




TURNING

2026 | CATALOG

www.euroloy.com

 **EUROLOY**
CARBIDE TOOLS

TURNING INSERT CODE SYSTEM (ISO)

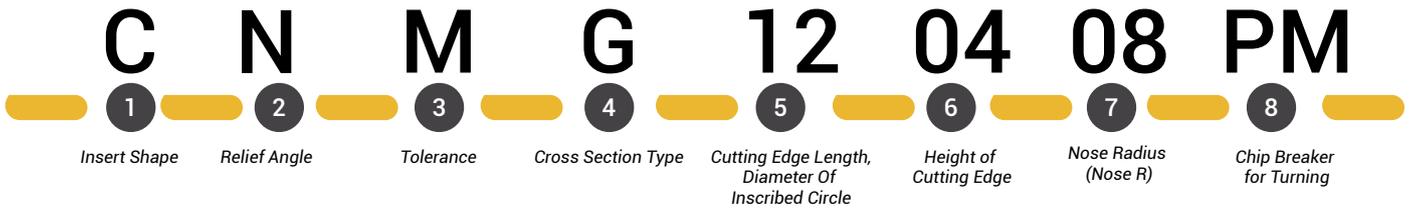

1 Insert Shape

C N M G 12 04 08 PM

C D E K L
R S T V W

2 Relief Angle

C N M G 12 04 08 PM

B C D E
F N P Özel Tip

4 Cross Section Type

C N M G 12 04 08 PM

A B C
F G H
J M N
Q R T
U W X

3 Tolerance

C N M G 12 04 08 PM

Class	d	m	t
A	± 0.025	± 0.005	± 0.025
C	± 0.025	± 0.013	± 0.025
H	± 0.013	± 0.013	± 0.025
E	± 0.025	± 0.025	± 0.025
G	± 0.025	± 0.025	± 0.013
J *	± 0.05~±0.15	± 0.005	± 0.025
K *	± 0.05~±0.15	± 0.013	± 0.025
L *	± 0.05~±0.15	± 0.025	± 0.025
M *	± 0.05~±0.15	± 0.08~±0.20	± 0.13
N *	± 0.05~±0.15	± 0.08~±0.18	± 0.025
U *	± 0.08~±0.25	± 0.13~±0.38	± 0.13

*Sides are based on unground insert

Tolerance on C,E,H,M,O,P,R,S,T,W Insert Shape (Exceptional Case)

d	Tolerance d		Tolerance m	
	J,K,L,M,N	U	M,N	U
6.35	± 0.05	± 0.08	± 0.08	± 0.13
9.525	± 0.05	± 0.08	± 0.08	± 0.13
12.7	± 0.08	± 0.13	± 0.13	± 0.20
15.875	± 0.10	± 0.18	± 0.15	± 0.27
19.05	± 0.10	± 0.18	± 0.15	± 0.27
25.4	± 0.13	± 0.25	± 0.18	± 0.38

Tolerance on D Insert Shape (Exceptional Case)


d	Tolerance d	Tolerance m
6.35	± 0.05	± 0.11
9.525	± 0.05	± 0.11
12.7	± 0.08	± 0.15
15.875	± 0.10	± 0.18
19.05	± 0.10	± 0.18

TURNING INSERT CODE SYSTEM (ISO)

Cutting Edge Length, Diam. of Incribed Circle

5

C N M G 12 04 08 PM




Metric						Inch	d(mm)
04	03	06	03	-	02	1.2 (5)	3.97
05	04	08	04	08	S3	1.5 (6)	4.76
06	05	09	05	09	03	1.8 (7)	5.56
-	-	-	06	-	-	-	6.00
07	06	11	06	11	04	2	6.35
09	07	13	07	13	05	2.5	7.94
-	-	-	08	-	-	-	8.00
11	09	16	09	16	06	3	9.525
-	-	-	10	-	-	-	10.00
13	11	19	11	19	07	3.5	11.11
-	-	-	12	-	-	-	12.00
15	12	22	12	22	08	4	12.70
17	14	24	14	24	09	4.5	14.29
19	15	27	15	27	10	5	15.875
-	-	-	16	-	-	-	16.00
21	17	30	17	30	11	5.5	17.46
23	19	33	19	33	13	6	19.05
-	-	-	20	-	-	-	20.00
27	22	38	22	38	15	7	22.225
-	-	-	25	-	-	-	25.00
31	25	44	25	44	17	8	25.40
38	31	54	31	54	21	10	31.75
-	-	-	32	-	-	-	32.00

Height of Cutting Edge

6

C N M G 12 04 08 PM

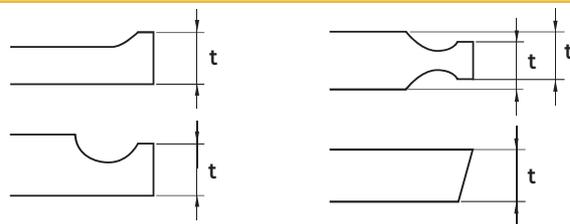

Symbol		Height of Cutting Edge (t)	
Metric	Inch	mm	Inch
01	1(2)	1.59	1/16
T0	1.125	1.79	9/128
T1	1.2	1.98	5/64
02	1.5(3)	2.38	3/32
T2	1.75	2.78	7/64
03	2	3.18	1/8
T3	2.5	3.97	5/32
04	3	4.76	3/16
05	3.5	5.56	7/32
06	4	6.35	1/4
07	5	7.94	5/16
09	6	9.52	3/8
11	7	11.11	7/16
12	8	12.70	1/2

Cutting Edge Length, Diam. of Incribed Circle

7

C N M G 12 04 08 PM



Symbol		Corner Radius	
Metric	Inch	Metric	Inch
003	0.1	0.03	0.001
005	0.13	0.05	0.002
	0.2	0.1	0.004
	0.5	0.2	0.008
	1	0.04	1/64
	2	0.8	1/32
	3	1.2	3/64
M0	4	1.6	1/16
	5	2.0	5/64
	6	2.4	3/32
	7	2.8	7/64
	8	3.2	1/8
	-		
	-		

Cutting Edge Length, Diam. of Incribed Circle

8

C N M G 12 04 08 PM


ISO Indexable Inserts - Positive



ISO Indexable Inserts - Negative



DNM...

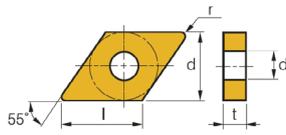


Dimension	Dimensions		
	d	t	d ₁
11	9.525	4.76	3.81
15	12.7	4.76-6.35	5.16

Insert Shape	CB	Insert Code	ISO		P							M				K			N	S				U							
			ap (mm)	Vc (m/min)	TC0105	TC0115	TC2115	TC0125	TC2125	TC2135	TC1310	TC1320	TP4310	TP4320	TP4330	TP4340	TC2210	TC0210	TC2215	TC0215	TN7501	TP2405	TP2410	TP4410	TP2430	TP2620	TP3620	TP2630	TP3630	TP4630	
					fn (mm/rev)	350(100-600)	300(220-400)	300(220-400)	240(200-320)	240(200-320)	145(45-250)	190(130-250)	180(120-250)	160(120-200)	150(110-200)	130(100-160)	90(70-110)	300(220-360)	300(220-360)	240(180-300)	240(180-300)	600(450-750)	50(30-90)	45(30-60)	45(30-60)	45(30-60)					
	PM1	DNMG 150604	0.40-1.60	0.10-0.30																											
		DNMG 150608	0.50-6.0	0.15-0.50																											
		DNMG 150612	0.80-6.0	0.18-0.60																											
	TM	DNMG 150404	0.90-5.0	0.20-0.30																											
		DNMG 150408	1.0-5.0	0.20-0.50																											
		DNMG 150412	1.30-5.0	0.20-0.50																											
		DNMG 150604	0.90-5.0	0.20-0.30																											
		DNMG 150608	1.0-5.0	0.20-0.50																											
		DNMG 150612	1.30-5.0	0.20-0.50																											
		DNMG 150412	1.20-3.90	0.23-0.65																											
	ST	DNMG 150404	0.40-3.90	0.08-0.22																											
		DNMG 150408	0.80-3.90	0.15-0.45																											
		DNMG 150412	1.20-3.90	0.23-0.65																											
		DNMG 150604	0.40-3.90	0.08-0.22																											
		DNMG 150608	0.80-3.90	0.15-0.45																											
		DNMG 150612	1.20-3.90	0.23-0.65																											
	PD	DNMG 110404	0.40-2.9	0.08-0.22																											
		DNMG 110408	0.80-2.9	0.15-0.44																											
		DNMG 150404	0.40-3.9	0.08-0.22																											
		DNMG 150408	0.80-3.9	0.15-0.44																											
		DNMG 150412	1.20-3.9	0.23-0.66																											
		DNMG 150604	0.40-3.9	0.08-0.22																											
		DNMG 150608	0.80-3.9	0.15-0.44																											
		DNMG 150612	1.20-3.9	0.23-0.66																											
	R/L	DNMG 150404R	0.70-4.50	0.10-0.35																											
		DNMG 150408R	1.0-4.50	0.12-0.45																											
		DNMG 150604R	0.70-4.50	0.10-0.35																											
		DNMG 150608R	1.0-4.50	0.12-0.45																											
		DNMG 150404L	0.70-4.50	0.10-0.35																											
		DNMG 150408L	1.0-4.50	0.12-0.45																											
		DNMG 150604L	0.70-4.50	0.10-0.35																											
		DNMG 150608L	1.0-4.50	0.12-0.45																											
	SMI	DNMG 110408	0.60-3.0	0.12-0.40																											
		DNMG 150408	0.30-2.0	0.18-0.30																											
		DNMG 150412	0.60-4.0	0.12-0.45																											
		DNMG 150608	0.60-4.0	0.12-0.40																											

● Stock item

○ Non Stock item

△ Special order

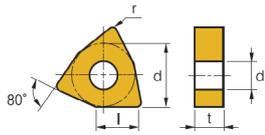

Dimensions			
Dimension	d	t	d1
06	9.525	4.76	3.81
08	12.7	4.76	5.16


Insert Shape	CB	Insert Code	ISO		P			M			K			N	S			U												
			ap (mm)	Vc (m/min)	TC0105	TC0115	TC0115	TC0125	TC0125	TC0135	TC1310	TC1320	TP4310	TP4320	TP4330	TP4340	TC2210	TC2210	TC2215	TC0215	TN7501	TP2405	TP2410	TP4410	TP2430	TP2620	TP3620	TP2630	TP3630	TP4630
					fn (mm/rev)	350(100-600)	300(220-400)	300(220-400)	240(200-320)	240(200-320)	145(45-250)	190(130-250)	180(120-250)	160(120-200)	150(110-200)	130(100-160)	90(70-110)	300(220-360)	300(220-360)	240(180-300)	240(180-300)	600(450-750)	50(30-90)	45(30-60)	45(30-60)	45(30-60)				
	P	WNMA 080404	0.60-4.30	0.10-0.30											●	●	●	●												
		WNMA 080408	1.20-4.30	0.10-0.30												●	●	●	●											
		WNMA 080412	1.80-4.30	0.30-0.90												●	●	●	●											
		WNMA 080416	2.40-4.30	0.40-1.20												●	●	●	●											
	EF3	WNMG 040404	0.50-1.50	0.07-0.30		△			△																					
		WNMG 080408	0.50-1.50	0.10-0.40		○			●																					
	AL	WNMG 060404	0.10-3.0	0.05-0.30																○										
		WNMG 060408	0.80-3.50	0.10-0.40																	○									
		WNMG 080404	0.80-3.50	0.05-0.30																	○									
		WNMG 080408	0.80-3.50	0.10-0.40																	●									
	PBI	WNMG 080404	0.25-2.20	0.05-0.15	○	○		○																						
		WNMG 080408	0.50-2.20	0.10-0.30	○	○		○																						
	ES1	WNMG 080412	0.75-2.20	0.15-0.45	○	○		○																						
		WNMG 080404	0.50-2.5	0.15-0.30		●		●																						
	P83	WNMG 080408	0.50-3.0	0.15-0.40		●		●																						
		WNMG 080412	0.50-3.0	0.17-0.44		●		●																						
	SF1	WNMG 080404	0.30-2.30	0.06-0.18		○		○																						
		WNMG 080408	0.60-2.30	0.12-0.35	○	○		○																						
		WNMG 080412	0.90-2.30	0.18-0.55		○		○																						
	MA	WNMG 060404	0.60-2.0	0.12-0.25																										
		WNMG 060408	0.60-2.0	0.18-0.40								○										○	○							
		WNMG 080404	0.60-1.6	0.12-0.25								○										○	○							
		WNMG 080408	0.12-1.20	0.12-0.32								○										○	○							
		WNMG 080412	0.12-1.20	0.12-0.45								○										○	○							
	SM1	WNMG 080404	0.30-2.0	0.14-0.28																								●		
		WNMG 080408	0.50-2.90	0.20-0.50																								●		
		WNMG 080412	0.80-3.50	0.24-0.60																										
	MBZ	WNMG 060408	0.60-2.50	0.12-0.36																										
		WNMG 060412	0.60-2.50	0.12-0.36																										
		WNMG 080404	0.12-1.20	0.10-0.30																			●							
		WNMG 080408	0.12-1.20	0.10-0.33																			●							
	MBZ	WNMG 080412	0.60-3.20	0.12-0.45																	●			●						
		WNMG 080404	0.25-2.20	0.05-0.15																			○							
	MBZ	WNMG 080408	0.50-2.20	0.10-0.30							○												○							
		WNMG 080408	0.50-2.20	0.10-0.30								○												○						

● Stock item

○ Non Stock item

△ Special order

VC...

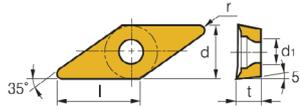

Dimension	Dimensions		
	d	t	d1
16	9.525	4.76	4.4


Insert Shape	CB	Insert Code	ISO		P								M				K				N	S				U					
			ap (mm)	Vc (m/min)	350(100-600)	300(220-400)	300(220-400)	240(200-320)	240(200-320)	145(45-250)	190(130-250)	180(120-250)	160(120-200)	150(110-200)	130(100-160)	90(70-110)	300(220-360)	300(220-360)	240(180-300)	240(180-300)	600(450-750)	50(30-90)	45(30-60)	45(30-60)	45(30-60)						
					TC0105	TC0115	TC2115	TC0125	TC2125	TC2135	TC1310	TC1320	TP4310	TP4320	TP4330	TP4340	TC2210	TC0210	TC2215	TC0215	TN7501	TP2405	TP2410	TP4410	TP2430	TP2620	TP3620	TP2630	TP3630	TP4630	
	AL1	VCGT 110302	0.05-3.0	0.02-0.20																●											
		VCGT 110304	0.10-4.0	0.02-0.25																●											
		VCGT 110308	0.10-5.0	0.03-0.30																●											
		VCGT 160402	0.05-5.0	0.02-0.30																●											
		VCGT 160404	0.10-5.0	0.03-0.40																●											
		VCGT 160408	0.10-5.0	0.03-0.50																○											
	SF1	VCMT 110304	0.12-1.5	0.06-0.15																	Δ										
		VCMT 160404	0.12-1.5	0.06-0.16																	Δ										
		VCMT 160408	0.16-1.6	0.10-0.22																	Δ										
	PBI	VCMT 160404	0.60-2.1	0.09-0.28							○	○	○															○			
		VCMT 160408	0.60-2.1	0.09-0.28							○	○	○															○			
	PS2	VCMT 160404	0.30-2.60	0.10-0.25							●																				
		VCMT 160408	0.60-2.60	0.12-0.33							●																				
	PCZ	VCMT 110304	0.35-2.1	0.05-0.16							○	○	○															○			
		VCMT 110308	0.70-2.1	0.10-0.32							○	○	○															○			
		VCMT 160404	0.35-3.1	0.05-0.16							○	○	○															○			
		VCMT 160408	0.70-3.1	0.10-0.32							○	○	○															○			

● Stock item

○ Non Stock item


△ Special order

EXTERNAL TURNING TOOL HOLDER CODE SYSTEM

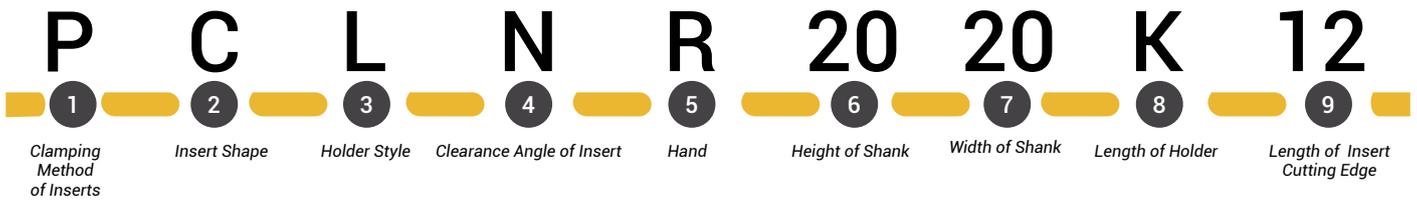

1 Clamping Method of Insert


H C L N R 20 20 - K 12

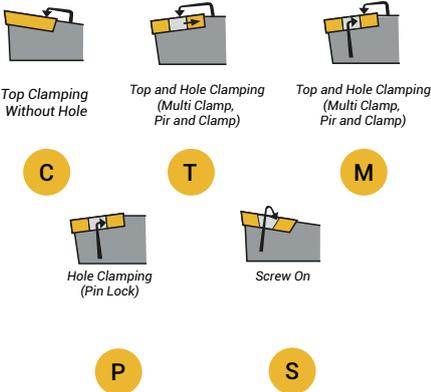

Top Clamping Without Hole (C)
 Top and Hole Clamping (Multi Clamp, Pir and Clamp) (T)
 Top and Hole Clamping (Multi Clamp, Pir and Clamp) (M)
 Hole Clamping (Pin Lock) (P)
 Screw On (S)

3 Holder Style


H C L N R 20 20 - K 12

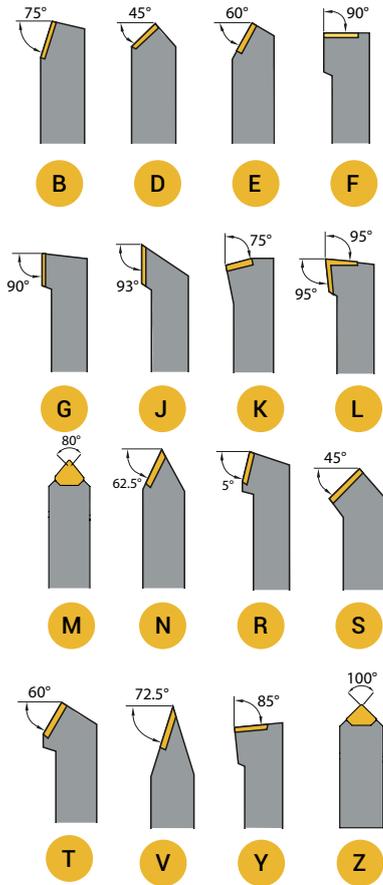

B D E F
 G J K L
 M N R S
 T V Y Z

4 Clearance Angle of Insert


H C L N R 20 20 - K 12

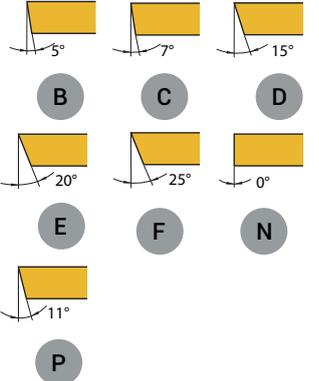

B C D
 E F N
 P

2 Insert Shape


H C L N R 20 20 - K 12

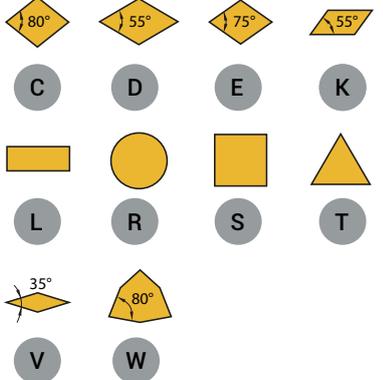

C D E K
 L R S T
 V W

5 Hand


H C L N R 20 20 - K 12

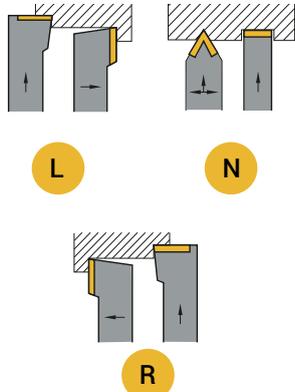

L N
 R


6 Height of Shank

H C L N R 20 20 - K 12

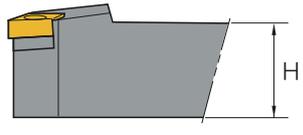

8 Length of Holder


H C L N R 20 20 - K 12

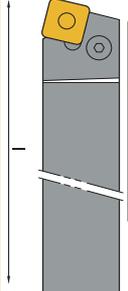

A-32	H-100	Q-180	X-Special Item
B-40	J-110	R-200	
C-50	K-125	S-250	
D-60	L-140	T-300	
E-70	M-150	U-350	
F-80	N-160	V-400	
G-90	P-170	W-450	


9 Length of Insert Cutting Edge

H C L N R 20 20 - K 12

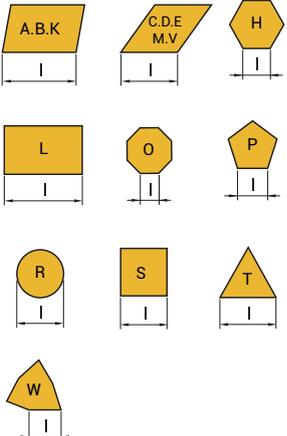

7 Width of Shank

H C L N R 20 20 - K 12




OVERVIEW - EXTERNAL TURNING


TCLNR/L



TCMNN




TCZNN



TDJNR/L




TDNNN




TSDNN




TSLNR/L




TSSNR/L



TTJNR/L




TWLNR/L



TVJNR/L



TVNNN




CKJNR/L



MTENN




MTJNR




MWLNR/L




MWDNN




PCLNR/L




PDNNN




PDJNR/L



PTJNR/L




PWLNR/L



SCLCR/L



SCNCN




SDJCR/L



SDNCN




SRDCN




SRGCR/L




SRHCR/L



STFCR/L



SVHBR/L



SVJBR/L



SVVBN



SVJCR/L



SVVCN




T TYPE TOOL HOLDER



CN**

TCLNR/L

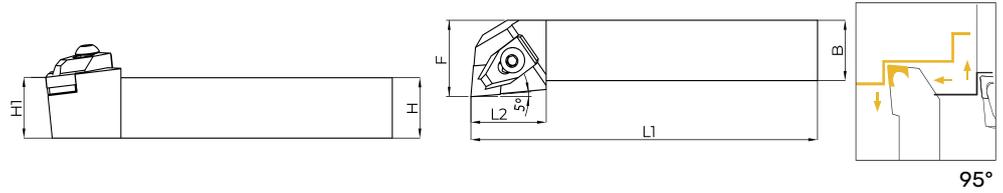


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TCLNR/L 1616-H12	•	•	16	16	25	100	35	CNM. 1204..	SCN12TM	SS0410M	CT0012M	CS0627M	A3
TCLNR/L 2020-K12	•	•	20	20	25	125	35						
TCLNR/L 2525-M12	•	•	25	25	32	150	40						
TCLNR/L 3232-P12	•	•	32	32	40	170	40	CNM. 1606...	SCN16TM	SS0510M	CT0016M	CS0627M	
TCLNR/L 2525-M16	•	•	25	25	32	150	40						
TCLNR/L 3232-P16	•	•	32	32	40	170	40	CNM. 1906..	SCN19TM	SS0510M	CT0019M	CS0825M	A5
TCLNR/L 3232-P19	•	•	32	32	40	170	40						
TCLNR/L 4040-R19	•	•	40	40	50	200	45						



CN**

TCMNN

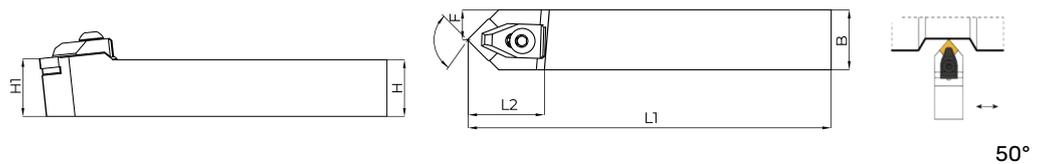


Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TCMNN 2020-K12	•	20	20	10	125	35	CNM. 1204	SCN12TM	SS0410M	CT0012M	CS0627M	A3
TCMNN 2525-M12	•	25	25	12,5	150	40						
TCMNN 3232-P12	•	32	32	16	170	40						
TCMNN 3232-P16	•	32	32	16	170	40	CNM. 1606	SCN16TM	SS0510M	CT0016M		
TCMNN 3232-P19	•	32	32	16	170	40						
TCMNN 4040-S19	•	40	40	20	250	40	CNM. 1906	SCN19TM	SS0510M	CT0019M	CS0825M	A5

T TYPE TOOL HOLDER



CN**

TCZNN

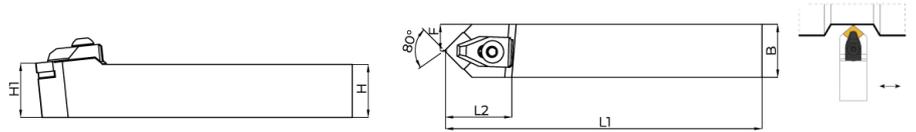


40°

Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TCZNN 2020-K12	•	20	20	10	125	35	CNM. 1204..	SCN12TM	SS0410M	CT0012M	CS0627M	A3
TCZNN 2525-M12	•	25	25	12,5	150	40						
TCZNN 3232-P12	•	32	32	16	170	40	CNM. 1606	SCN16TM	SS0510M	CT0016TM	CS0825M	A5
TCZNN 3232-P16	•	32	32	16	170	40				CT0019TM		
TCZNN 3232-P19	•	32	32	16	170	40	CNM. 1906	SCN19TM				
TCZNN 4040-R19	•	40	40	20	200	40						



DN**

TDJNR/L

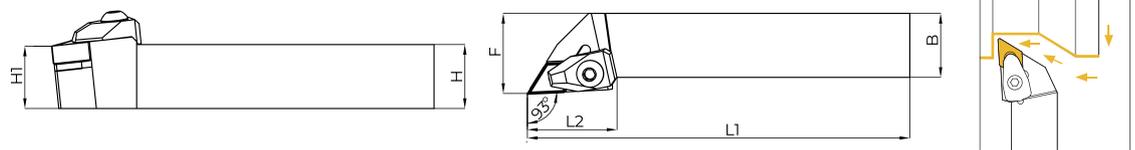

93°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TDJNR/L 1616-K11	•	•	16	16	21	125	30	DNM. 1104..	SDN11TM	SS0411M	CT0011M	CS0523M	A3
TDJNR/L 2020-K11	•	•	20	20	25	125	35						
TDJNR/L 2525-M11	•	•	25	25	32	150	40	DNM. 1506..	SDN15TM	SS0410M	CT0015M	CS0627M	
TDJNR/L 1616-K15	•	•	16	16	21	125	30						
TDJNR/L 2020-K15	•	•	20	20	25	125	35						
TDJNR/L 2525-M15	•	•	25	25	32	150	40						
TDJNR/L 3232-P15	•	•	32	32	40	170	40						
TDJNR/L 4040-R15	•	•	40	40	50	200	45						

T TYPE TOOL HOLDER



DN**

TDNNN

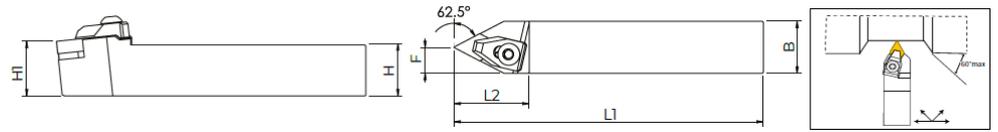


62.5°

Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TDNNN 1616-H11	•	16	16	8	100	30	DNM. 1104..	SDN11TM	SS0411M	CT0011M	CS0523M	A3
TDNNN 2020-K11	•	20	20	10	125	35						
TDNNN 2525-M11	•	25	25	12,5	150	40						
TDNNN 2020-K15	•	20	20	10	125	35	DNM. 1506..	SDN15TM	SS0410M	CT0015M	CS0627M	
TDNNN 2525-M15	•	25	25	12,5	150	40						
TDNNN 3232-P15	•	32	32	16	170	40						
TDNNN 4040-R15	•	40	40	20	200	45						



SN**

TSDNN

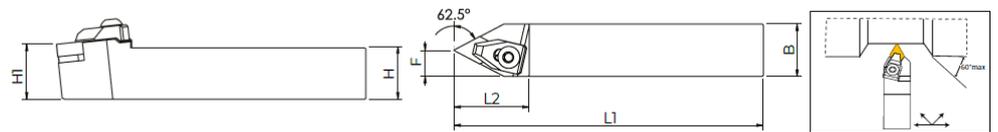


45°

Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TSDNN 2020-K12	•	20	20	10	125	35	SNMG 1204..	SSN12TM	SS0410M	CT0012M	CS0627M	A3
TSDNN 2525-M12	•	25	25	12,5	150	40						
TSDNN 3232-P15	•	32	32	16	170	40	SNMG 1506	SSN15TM	SS0510M	CT0015M	CS0627M	A3
TSDNN 4040-R15	•	40	40	20	200	45						
TSDNN 3232-P19	•	32	32	16	170	40	SNMG 1906	SSN19TM	SS0510M	CT0019M	CS0825M	A5
TSDNN 4040-R19	•	40	40	20	200	45						

T TYPE TOOL HOLDER



SN**

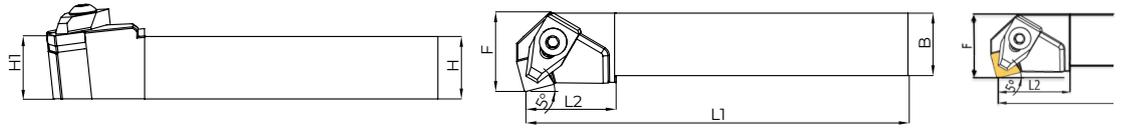


TSLNR/L

95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TSLNR/L 2020-K12	•	•	20	20	25	125	35	SNMG 1204	SSN12TM	SS0410M	CT0012M	CS0627M	A3
TSLNR/L 2525-M12	•	•	25	25	32	150	40		SSN12TM	SS0410M			
TSLNR/L 3232-P12	•	•	32	32	40	170	40	SNMG 1204	SSN12TM	SS0410M	CT0012M	CS0627M	A3
TSLNR/L 3232-P15	•	•	32	32	40	170	40	SNMG 1506	SSN15TM	SS0510M	CT0015M	CS0627M	A3
TSLNR/L 3232-P19	•	•	32	32	40	170	40	SNMG 1906	SSN19TM	SS0510M	CT0019M	CS0815M	A5
TSLNR/L 4040-P15	•	•	40	40	50	170	40	SNMG 1506	SSN15TM	SS0510M	CT0015M	CS0627M	A3
TSLNR/L 4040-R19	•	•	40	40	50	200	45	SNMG 1906	SSN19TM	SS0510M	CT0019M	CS0825M	A5



SN**

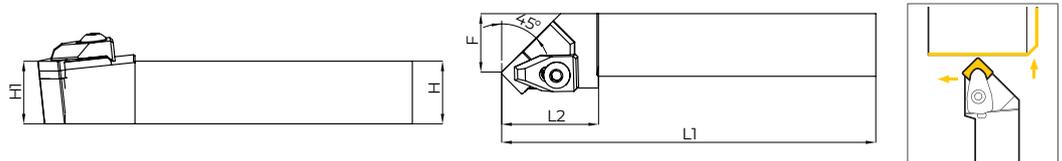

TSSNR/L

45°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TSSNR/L 2020-K12	•	•	20	20	19	125	35	SNMG 1204	SSN12TM	SS0410M	CT0012M	CS0627M	A3
TSSNR/L 2525-M12	•	•	25	25	24	150	40						
TSSNR/L 3232-P12	•	•	32	32	30	170	40	SNMG 1506	SSN15TM	SS0410M	CT0019M	CS0627M	A3
TSSNR/L 3232-P15	•	•	32	32	30	170	40						
TSSNR/L 3232-P19	•	•	32	32	30	170	40	SNMG 1906	SSN19TM	SS0510M	CT0019M	CS0825M	A5
TSSNR/L 4040-R19	•	•	40	40	38	200	45						

T TYPE TOOL HOLDER



TN**

TTJNR/L

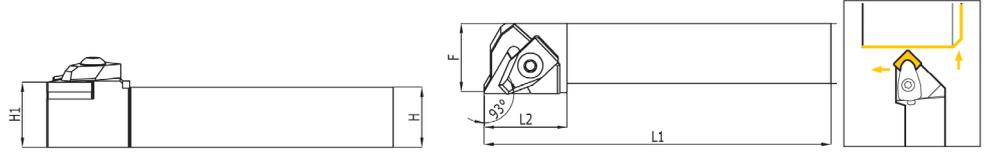


93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TTJNR/L 1616-H16	•	•	16	16	21	100	30	TNMG 1604	STN16TMM	SS0410M	CT0016M	CS0523M	A3
TTJNR/L 2020-K16	•	•	20	20	25	125	35						
TTJNR/L 2525-M16	•	•	25	25	32	150	40						
TTJNR/L 2020-K22	•	•	20	20	25	125	35	TNMG 2204	STN22TMM	SS0410M	CT0022M	CS0627M	
TTJNR/L 2525-M22	•	•	25	25	32	150	40						
TTJNR/L 3232-P22	•	•	32	32	40	170	40						
TTJNR/L 4040-R22	•	•	40	40	50	200	45	TNMG 2204	STN22TMM	SS0410M	CT0022M	CS0627M	A3



WN**

TWLNRL/L

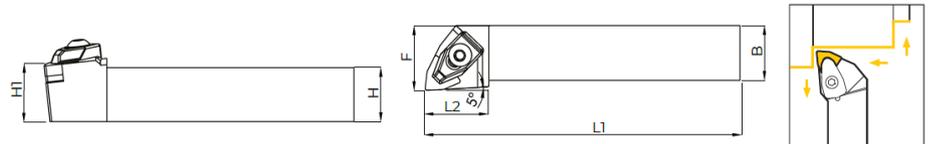

95°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Clamp Screw
TWLNRL/L 1616-K06	•	•	16	16	21	125	30	WNM.0602..	-	-	CT0006M	CS0515M	A3
TWLNRL/L 2020-K06	•	•	20	20	25	125	35						
TWLNRL/L 2525-M06	•	•	25	25	32	150	40						
TWLNRL/L 2020-K08	•	•	20	20	25	125	35	WNM.0804..	SWN08TMM	SS0410M	CT0008M	CS0627M	
TWLNRL/L 2525-M08	•	•	25	25	32	150	40						
TWLNRL/L 3232-P08	•	•	32	32	40	170	40						
TWLNRL/L 4040-R08	•	•	40	40	50	200	45						

T TYPE TOOL HOLDER



VN**

TVJNR/L

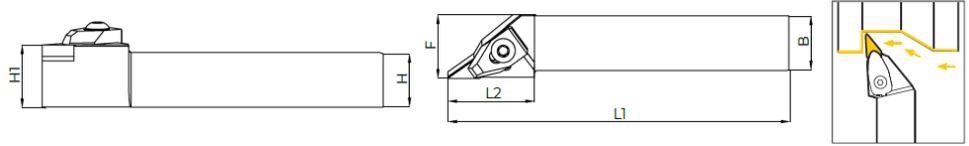


93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TVJNR/L 1616-K16	•	•	16	16	25	125	35	VNMG 1604	SVN16TM	SS0411M	CT0016M	CS0627M	A3
TVJNR/L 2020-K16	•	•	20	20	25	125	35						
TVJNR/L 2525-M16	•	•	25	25	32	150	40						
TVJNR/L 3232-P16	•	•	32	32	40	170	40						
TVJNR/L 4040-R16	•	•	40	40	50	200	45						



VN**

TVNNN

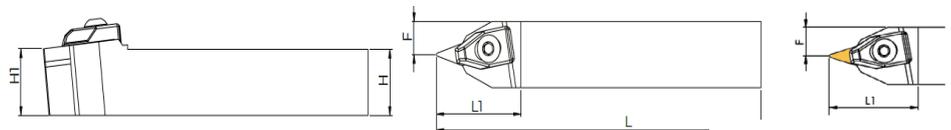


72.5°

Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TVNNN 2020-K16	•	20	20	10	125	30	VNMG 1604	SVN16TM	SS0411M	CT0116M	CS0627M	A3
TVNNN 2525-M16	•	25	25	12,5	150	35						
TVNNN 3232-P16	•	32	32	16	170	40						
TVNNN 4040-P16	•	40	40	16	170	40						

C TYPE TOOL HOLDER



KN**

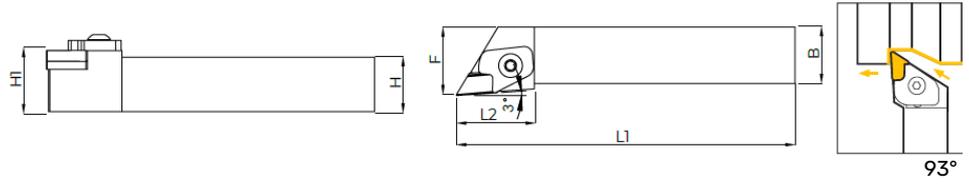
CKJNR/L


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Screw	Clamp	Screw
CKJNR/L 2020-K16	•	•	20	20	25	125	35	KNUX 1604..	SK16RCM	SS0310M	CC0016M	CS0622M	A5
CKJNR/L 2525-M16	•	•	25	25	32	150	40						
CKJNR/L 3232-P16	•	•	32	32	40	170	40						
CKJNR/L 4040-R16	•	•	40	40	50	200	45						

M TYPE TOOL HOLDER



TN**

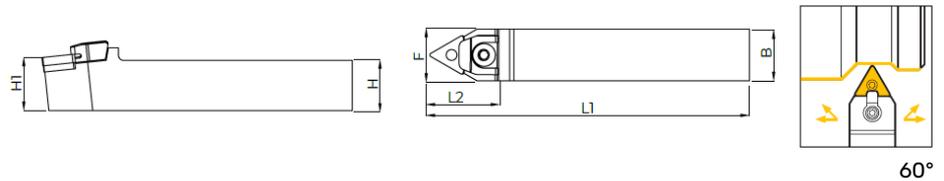MTENN


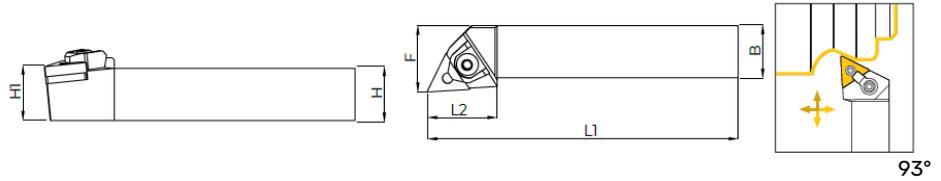
Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1	H	B	F	L1		L2	Shim	Shim Pin	Clamp	Screw
MTENN 1616-K16	•	16	16	8	125	30	TNMG 1604	STN16TMM	SP053615M	CM0016M	CS0627M	A3
MTENN 2020-K16	•	20	20	10	125	35						
MTENN 2525-M16	•	25	25	12.5	150	40						
MTENN 3232-P16	•	32	32	16	170	35						
MTENN 2525-M22	•	25	25	12.5	150	40	TNMG 2204	STN22TMM	SPTN22M	CM0022M		
MTENN 3232-P22	•	32	32	16	170	40						
MTENN 4040-R22	•	40	40	20	200	45						

M TYPE TOOL HOLDER



TN**

MTJNR/L




93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
			H1	H	B	F	L1		L2	Shim	Shim Pin	Clamp	Screw
MTJNR/L 1616-K16	•	•	16	16	20	125	35	TNMG 1604	STN16TMM	SP053615M	CM0016M	CS0627M	A3
MTJNR/L 2020-K16	•	•	20	20	25	125	35						
MTJNR/L 2525-M16	•	•	25	25	32	150	40						
MTJNR/L 3232-P16	•	•	32	32	40	170	40						
MTJNR/L 2525-M22	•	•	25	25	32	150	40	TNMG 2204	STN22TMM	SPTN22M	CM022M	CS0627M	A3
MTJNR/L 3232-P22	•	•	32	32	40	170	40						
MTJNR/L 4040-R22	•	•	40	40	50	200	45						



WN**

MWLNR/L

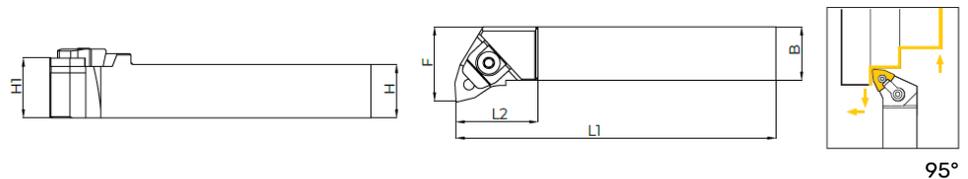

95°




Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
			H1	H	B	F	L1		L2	Shim	Shim Pin	Clamp	Screw
MWLNR/L 1616-H06	•	•	16	16	30	100	35	WNM.0602..	SWN06MM	SP053615M	CM0006M	CS0523M	A3
MWLNR/L 2020-K06	•	•	20	20	25	125	35						
MWLNR/L 2525-M06	•	•	25	25	32	150	40						
MWLNR/L 2020-K08	•	•	20	20	25	125	35	WNM.0804..	SWN08MM	SPTN22M	CM0008M	CS0627M	A3
MWLNR/L 2525-M08	•	•	25	25	32	150	40						
MWLNR/L 3232-P08	•	•	32	32	40	170	40						
MWLNR/L 4040-R08	•	•	40	40	50	200	45						

M TYPE TOOL HOLDER



WN**

MWDNN

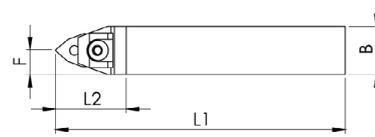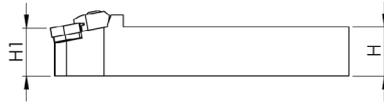

50°


Order Code	Stock Availability	Dimensions (mm)					Insert	Spare Parts				
		H1	H	B	F	L1		L2	Shim	Shim Pin	Clamp	Screw
MWDNN 1616-K06	•	16	16	8	125	35	WNM.0604	SWN06MM	SP053615M	CM0006M	CS0523M	A3
MWDNN 2020-K06	•	20	20	10	125	35						
MWDNN 2020-K08	•	20	20	10	125	40	WNM.0804..	SWN08MM	SP0658M	CM0008M	CS0627M	
MWDNN 2525-M08	•	25	25	12.5	150	40						
MWDNN 3232-P08	•	32	32	16	170	40						
MWDNN 4040-R08	•	40	40	20	200	45						

P TYPE TOOL HOLDER



CN**

PCLNR/L

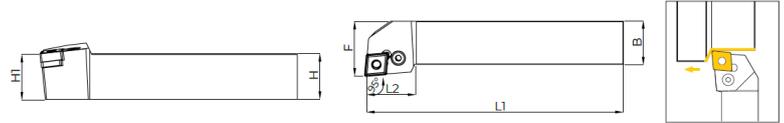


95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Crowbar	Metal Sheet
PCLNR/L 2020-K12	•	•	20	20	25	125	35	CNM. 1204..	SCN12PM	SM8KM	CPL012M	SSP012M	A3
PCLNR/L 2525-M12	•	•	25	25	32	150	35						
PCLNR/L 3232-P12	•	•	32	32	40	170	40						
PCLNR/L 4040-R12	•	•	40	40	50	200	40	CNM. 1606..	SCN16PM	SM8UM	CPL016M	SSP016M	A4
PCLNR/L 2525-M16	•	•	25	25	32	150	40						
PCLNR/L 3232-P16	•	•	32	32	40	170	40						
PCLNR 4040-R16		•	40	40	50	200	45	CNM. 1906..	SCN19PM		CPL019M	SSP019M	
PCLNR/L 3232-P19	•	•	32	32	40	170	40						
PCLNR 4040-R19		•	40	40	50	200	45						



DN**

PDNNN

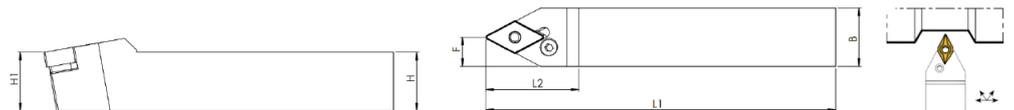

62.5°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts					
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Crowbar	Metal Sheet	Allen Key
PDNNN 2020-K16		•	20	20	25	125	35	DNM1606	SDN16PM	SM8KM	CPL015M	SSP015M	A3	
PDNNN 2525-M16		•	25	25	32	150	40							
PDNNN 3232-P16		•	32	32	40	170	40			SM8UM				A4
PDNNN 4040-R16		•	40	40	45	200	45							

P TYPE TOOL HOLDER



DN**

PDJNR/L

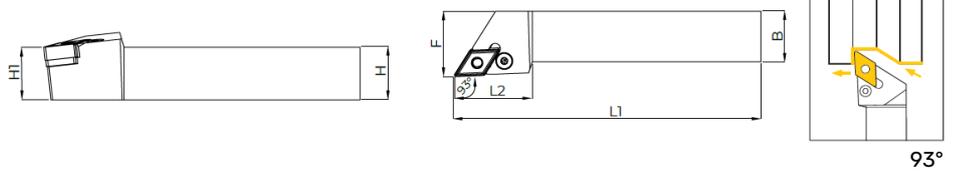


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	F	L1	L2		Shim	Shim Screw	Crowbar	Metal Sheet	Allen Key
PDJNR/L 2020-K15	•	•	20	20	25	125	35	DNM. 1506..	SDN15PM	SM8KM	CPL015M	SSP015M	A3
PDJNR/L 2525-M15	•	•	25	25	32	150	40						
PDJNR/L 3232-P15	•	•	32	32	40	170	40			SM8UM	A4		
PDJNR/L 4040-R15	•	•	40	40	45	200	45						



TN**

PTJNR/L

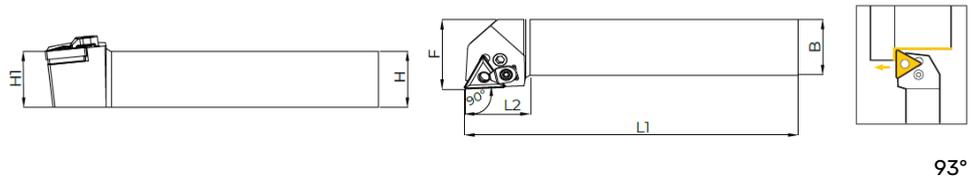


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	F	L1	L2		Shim	Shim Screw	Crowbar	Metal Sheet	Allen Key
PTJNR 2020-K16		•	20	20	25	125	35	TNMG 1604	STN16PM	SM8KM	CPL016M	SSP016M	A3
PTJNR 2525-M16		•	25	25	32	150	40			SM8KM			
PTJNR 3232-P16		•	32	32	40	170	40			SM8UM			
PTJNR/L 2525-M22	•	•	25	25	32	150	40	TNMG 2204	STN22PM	SM8KM	CPL022M	SSP022M	A4
PTJNR/L 3232-P22	•	•	32	32	40	170	40			SM8UM			
PTJNR 4040-R22		•	40	40	50	200	45						



WN**

PWLNR/L

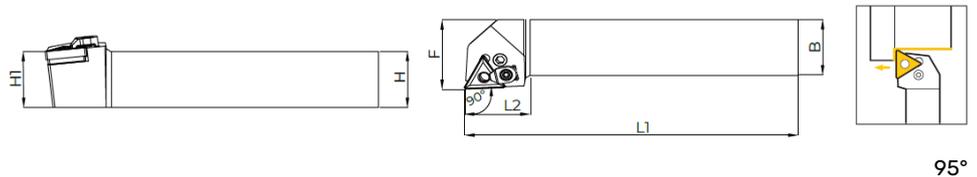


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	F	L1	L2		Shim	Shim Screw	Crowbar	Metal Sheet	Allen Key
PWLNR/L 2020-K08	•	•	20	20	25	125	35	WNM.0804..	SWN08PM	SM8KM	CPL08M	SSP08M	A3
PWLNR/L 2525-M08	•	•	25	25	32	150	40						
PWLNR/L 3232-P08	•	•	32	32	40	170	40			SM8UM			A4
PWLNR/L 4040-R08	•	•	40	40	50	200	45						

S TYPE TOOL HOLDER



CC**

SCLCR/L

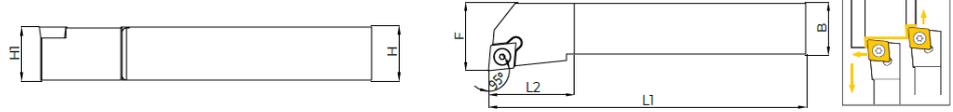


95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Screw	Allen Key
SCLCR/L 0808-H06	•	•	8	8	10	100	20	CC.T 0602..	-	-	-	SM2,5X7	T8
SCLCR/L 1010-H06	•	•	10	10	12	100	20						
SCLCR/L 1212-H06	•	•	12	12	15	100	20						
SCLCR/L 1616-H06	•	•	16	16	20	100	25						
SCLCR/L 1212-H09	•	•	12	12	15	100	20	CC.T 09T3..	-	-	-	T15	
SCLCR/L 1616-H09	•	•	16	16	20	100	25						
SCLCR/L 2020-K09	•	•	20	20	25	125	35						
SCLCR/L 2525-M09	•	•	25	25	32	150	35						
SCLCR/L 1616-H12	•	•	16	16	20	100	25	CC.T 1204..	SCC12SM	SS0610M	-	T15	
SCLCR/L 2020-K12	•	•	20	20	25	125	35						
SCLCR/L 2525-M12	•	•	25	25	32	150	35						
SCLCR/L 3232-P12	•	•	32	32	40	170	40						



CC**

SCNCN

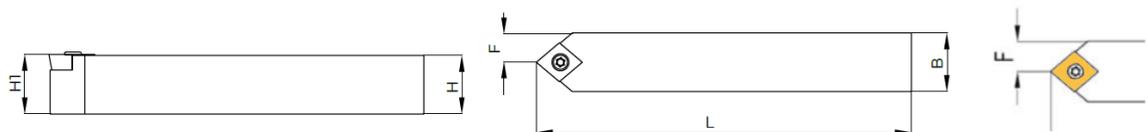

50°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Screw	Allen Key
SCNCN 0808-H06	•		8	8	4	100	16	CC.T 0602..	-	-	-	SM2,5X7	T8
SCNCN 1010-H06	•		10	10	5	100	16						
SCNCN 1212-H06	•		12	12	6	100	20						
SCNCN 1212-H09	•		12	12	6	100	20	CC.T 09T3..	-	-	-	T15	
SCNCN 1616-H09	•		16	16	8	100	25						
SCNCN 2020-K09	•		20	20	10	125	35						
SCNCN 2525-M12	•		25	25	12,5	150	40	CC.T 1204..	SCC12SM	SS0610M	-	SM4X16	

S TYPE TOOL HOLDER



DC**

SDJCR/L

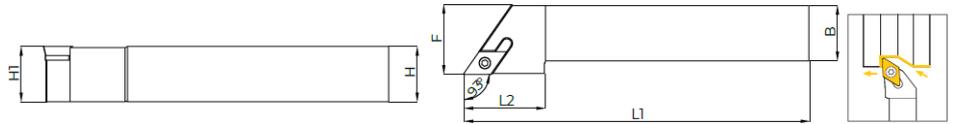


93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SDJCR/L 0808-H07	•	•	8	8	10	100	16	DC.T 0702..	-	-	-	SM2,5X7	T8
SDJCR/L 1010-H07	•	•	10	10	12	100	16						
SDJCR/L 1212-H07	•	•	12	12	16	100	20						
SDJCR/L 1616-H07	•	•	16	16	20	100	25						
SDJCR/L 1616-H11	•	•	16	16	20	100	25						
SDJCR/L 2020-K11	•	•	20	20	25	125	35	DC.T 11T3..	SDC11SM	SS050535M	-	SM3,5X14	T15
SDJCR/L 2525-M11	•	•	25	25	32	150	40						
SDJCR/L 3232-P11	•	•	32	32	40	170	40						



DC**

SDNCN

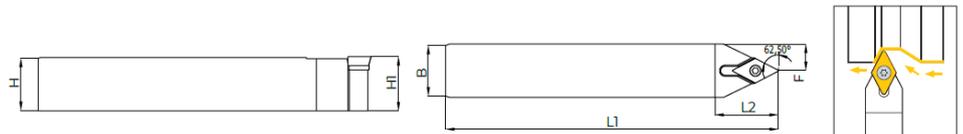

62.5°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SDNCN 0808-H07	•		8	8	4	100	16	DC.T 0702..	-	-	-	SM2,5X7	T8
SDNCN 1010-H07	•		10	10	5	100	16						
SDNCN 1212-H07	•		12	12	6	100	20						
SDNCN 1616-H07	•		16	16	8	100	25						
SDNCN 1212-M11	•		12	12	6	150	20	DC.T 11T3..	SDC11SM	SS050535M	-	SM3,5X14	T15
SDNCN 1616-H11	•		16	16	8	100	25						
SDNCN 2020-K11	•		20	20	10	125	35						
SDNCN 2525-M11	•		25	25	12,5	150	40						
SDNCN 3232-P11	•		32	32	16	170	45						

S TYPE TOOL HOLDER



RC**

SRDCN

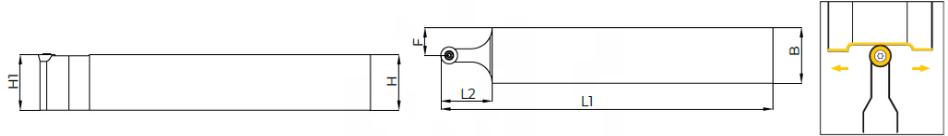


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	F	L1	L2		Shim	Shim Screw	Clamp	Screw	Allen Key
SRDCN 1616-H08	•		16	16	8	100	20	RC.T 0803.	-	-	-	SM3X10	T10
SRDCN 2020-K08	•		20	20	10	125	30		-	-	-		
SRDCN 2525-M08	•		25	25	12,5	150	35		-	-	-		
SRDCN 1616-H10	•		16	16	8	100	20	RC.T 10T3..	-	-	-	SM4X12	T15
SRDCN 2020-K10	•		20	20	10	125	30		-	-			
SRDCN 2525-M10	•		25	25	12,5	150	35		-	-			
SRDCN 3232-P10	•		32	32	16	170	40	RC.T 1204..	-	-	-	SM4X12	T15
SRDCN 2020-K12	•		20	20	10	125	30		-	-			
SRDCN 2525-M12	•		25	25	12,5	150	35		-	-			
SRDCN 3232-P12	•		32	32	16	170	40	RC.T 1604..	-	-	-	SM5X12	T20
SRDCN 2525-M16	•		25	25	12,5	150	35		-	-			



RC**

SRGCR/L

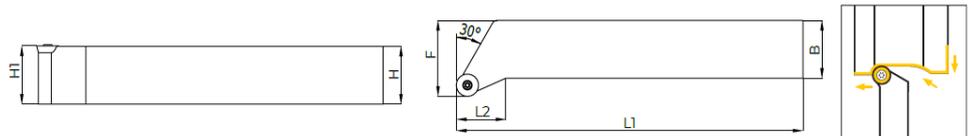


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	F	L1	L2		Shim	Shim Screw	Clamp	Screw	Allen Key
SRGCR/L 1616-K08	•	•	16	16	21	125	25	RC.T 0803..				SM3X10	T10
SRGCR/L 1616-H10	•	•	16	16	21	100	25	RC.T 10T3..				SM4X12	T15
SRGCR/L 2525-M08	•	•	20	20	25	125	35	RC.T 0803..	-	-	-	SM3X10	T10
SRGCR/L 2525-M08	•	•	25	25	32	150	40		-	-	-		
SRGCR/L 2020-K10	•	•	20	20	25	125	35	RC.T 10T3..	-	-	-	SM4X12	T15
SRGCR/L 2525-M10	•	•	25	25	32	150	40		-	-			
SRGCR/L 2020-K12	•	•	20	20	25	125	35	RC.T 1204..	-	-	-	SM4X12	T15
SRGCR/L 2525-M12	•	•	25	25	32	150	40		-	-			
SRGCR/L 3232-P10	•	•	32	32	40	170	40	RC.T 10T3..					
SRGCR/L 3232-P12	•	•	32	32	40	170	40	RC.T 1204..					

S TYPE TOOL HOLDER



SRHCR/L

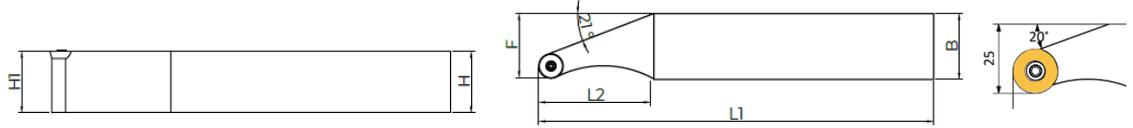


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts						
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw	Allen Key	
SRHCR 1616-H08	•	•	16	16	16	16	100	20	RC.T 0803..	-	-	-	SM3X10	T10	
SRHCR/L 2020-K08	•	•	20	20	20	20	125	35		-	-	-	-	-	
SRHCR/L 2525-M08	•	•	25	25	25	25	150	40		-	-	-	-	-	
SRHCR/L 2020-K10	•	•	20	20	20	20	125	35	RC.T 10T3..	-	-	-	SM4X12	T15	
SRHCR/L 2525-M10	•	•	25	25	25	25	150	40		-	-	-			-
SRHCR 1616-K12	•	•	16	16	16	16	125	25	RC.T 1204..	-	-	-	SM4X12	T15	
SRHCR/L 2020-K12	•	•	20	20	20	20	125	35		-	-	-			-
SRHCR/L 2525-M12	•	•	25	25	25	25	150	40		-	-	-			-
SRHCR/L 3232-K12	•	•	32	32	32	32	125	35		-	-	-			-



TC**

STFCCR/L

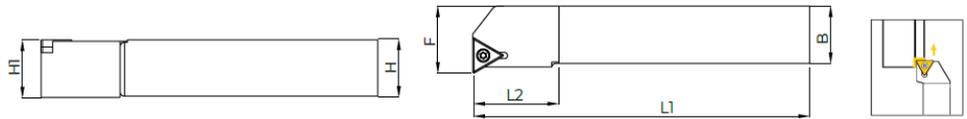

90°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts					
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw	Allen Key
STFCCR/L 1212-H11	•	•	12	12	16	16	100	25	TC.T 11..	-	-	-	SM2,5X7	T8
STFCCR/L 1616-H11	•	•	16	16	20	20	100	25		-	-	-	-	-
STFCCR/L 1616-H16	•	•	16	16	20	20	100	25	TC.T 16T3..	STC16SM	SS050535M	-	SM3,5X14	T15
STFCCR/L 2020-K16	•	•	20	20	25	25	125	35		-	-	-	-	-
STFCCR/L 2525-M16	•	•	25	25	32	32	150	40		-	-	-	-	-

S TYPE TOOL HOLDER



VB**

SVHBR/L

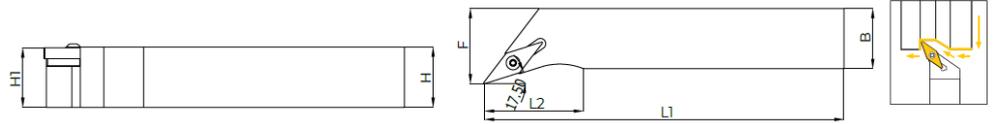


107.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SVHBR/L 1616-H11	•	•	16	16	20	100	25	VBM. 1103..	-	-	-	SM2,5X7	T08
SVHBR/L 2020-K11	•	•	20	20	25	125	30		-	-	-	SM2,5X7	T08
SVHBR/L 2020-K16	•	•	20	20	25	125	35		-	-	-	SM2,5X7	T08
SVHBR/L 2525-M16	•	•	25	25	32	150	40	VBM. 1604..	SVB16SM	SS050535M	-	SM3,5X14	T15
SVHBR/L 3232-P16	•	•	32	32	40	170	40						



TC**

SVJBR/L

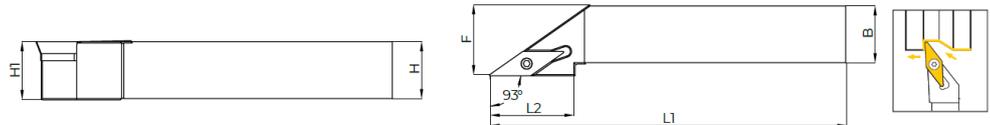


93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SVJBR 1212-H11		•	12	12	20	100	20	VBM. 1103..	-	-	-	SM2,5X7	T08
SVJBR/L 1616-H11	•	•	16	16	20	100	25						
SVJBR/L 2020-K11	•	•	20	20	25	125	30						
SVJBR 2525-M11		•	25	25	32	150	40	VBM. 1604..	SVB16SM	SS050535M	-	SM3,5X14	T15
SVJBR/L 1616-H16	•	•	16	16	20	100	25						
SVJBR/L 2020-K16	•	•	20	20	25	125	35						
SVJBR/L 2525-M16	•	•	25	25	32	150	40						
SVJBR/L 3232-P16	•	•	32	32	40	170	40						

S TYPE TOOL HOLDER



SVVBN

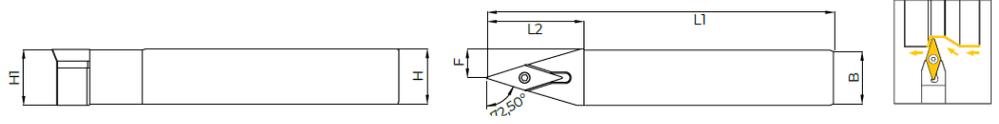


72.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SVVBN 1212-H11	•		12	12	6	100	20	VBM. 1103..	-	-	-	SM2,5X7	T08
SVVBN 1616-H11	•		16	16	8	100	25						
SVVBN 2020-K11	•		20	20	12,5	125	35						
SVVBN 1616-H16	•		16	16	8	100	25	VBM. 1604..	SVB16SM	SS050535M	-	SM3,5X14	T15
SVVBN 2020-K16	•		20	20	10	125	35						
SVVBN 2525-M16	•		25	25	12,5	150	40						
SVVBN 3232-P16	•		32	32	16	170	40						



SVJCR/L

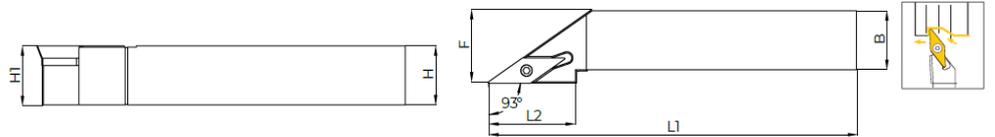

93°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SVJCR/L 1212-H11	•	•	12	12	20	100	20	VCM. 1103..	-	-	-	SM2,5X7	T08
SVJCR/L 1616-H11	•	•	16	16	20	100	25						
SVJCR/L 2020-K11	•	•	20	20	25	125	35						
SVJCR/L 1616-H16	•	•	16	16	20	100	25	VCM. 1604..	SVC16SM	SS050535M	-	SM3,5X14	T15
SVJCR/L 2020-K16	•	•	20	20	25	125	35						
SVJCR/L 2525-M16	•	•	25	25	32	150	40						
SVJCR/L 3232-P16	•	•	32	32	40	170	40						

S TYPE TOOL HOLDER



VC**


SVVCN

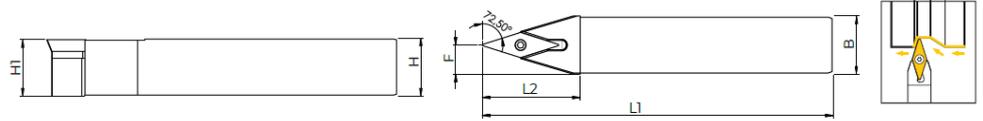

72.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1	H	B	F	L1		L2	Shim	Shim Screw	Clamp	Screw
SVVCN 1212-H11		•	12	12	6	100	20	VCM. 1103..	-	-	-	SM2,5X7	T08
SVVCN 1616-H11		•	16	16	8	100	25		-	-	-	SM2,5X7	T08
SVVCN 2020-K11		•	20	20	12,5	125	35		-	-	-	SM2,5X7	T08
SVVCN 1616-H16		•	16	16	8	100	25	VCM. 1604..	SVC12SM	SS050535M	-	SM3,5X14	T15
SVVCN 2020-K16		•	20	20	10	125	35						
SVVCN 2525-M16		•	25	25	12,5	150	40						
SVVCN 3232-P16		•	32	32	16	170	40						

INTERNAL TURNING TOOL HOLDER CODE SYSTEM

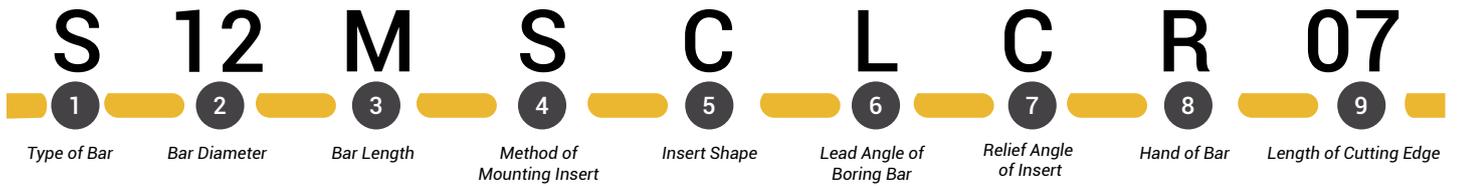

1 Type of Bar

1
S
12
M
-
S
C
L
C
R
-
07

- "A" Steel with coolant hole
- "E" Carbide bar with fixed steel head and coolant hole
- "C" Carbide Shank
- "S" Steel Shank
- "X" Special type

2 Bar Diameter

2
S
12
M
-
S
C
L
C
R
-
07

3 Bar Length

3
S
12
M
-
S
C
L
C
R
-
07

Length (L)	(mm)
H	100
J	110
K	125
M	150
N	160
Q	180
R	200
S	250
T	300
U	350
V	400
W	450
Y	500

4 Method of Mounting Insert

4
S
12
M
-
S
C
L
C
R
-
07

Top Clamping

Top and Hole Clamping

C

D

Top and Hole Clamping

Hole Clamping

Screw On

S

5 Insert Shape

5
S
12
M
-
S
C
L
C
R
-
07

6 Lead Angle of Boring Bar

6
S
12
M
-
S
C
L
C
R
-
07

95°

L

90°

F

93°

U

75°

K

108°

Q

93°
(95°)

Z

142°

J

60°

W

90°

X

-

8 Hand of Bar

8
S
12
M
-
S
C
L
C
R
-
07

R

L

7 Relief Angle of Insert

7
S
12
M
-
S
C
L
C
R
-
07

5°

B

7°

C

0°

P

11°


N

9 Length of Cutting Edge

9
S
12
M
-
S
C
L
C
R
-
07


OVERVIEW - INTERNAL TURNING

S.../A...SCLCR/L




Page:52 95°

S.../A...SDUCR/L




Page:53 93°

S.../A...SDQCR/L




Page:54 107.5°

S...SD-CR/L




Page:55 62.5°

S...SDXCR/L




Page:55 93°

S...STFCR/L




Page:56 90°

S...SVJBR/L




Page:56 93°

S...SVUBR/L




Page:56 93°

S...SVUCR/L




Page:57 93°

S...SDPCR/L




Page:57 117.5°

S...CKUNR/L




Page:58 93°

S...TCLNR/L




Page:58 95°

S...TDQNR/L




Page:59 107.5°

S...TDUNR/L




Page:59 93°

S...TD-NR/L




Page:60 62.5°

S...TWLNR/L




Page:60 95°

S...MTUNR/L




Page:61 93°

S...MT-NR/L




Page:61 60°

S...MWLNR/L




Page:62 95°

S...MTQNR/L




Page:62 107.5°

S...PCLNR/L




Page:63 95°

S...PDUNR/L




Page:63 93°

S...PTUNR



Page:64 93°


S...PWLNR/L



Page:64 95°


ANTI-VIBRATION

SCLCR/L



Page:65 95°

SDUCR/L





Page:65 93°

S TYPE TOOL HOLDER



CC**

S.../A...SCLCR/L

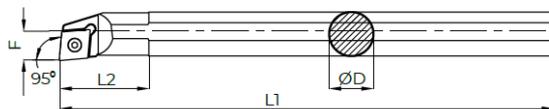

95°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S06-08H SCLCR/L-06	•	•	8	10	6	100	30	CC.T 0602..	-	-	SM2,5X5	T08
A06-08H SCLCR/L-06	•	•	8	10	6	100	30					
S08H SCLCR/L-06	•	•	8	11	6	100	25					
A08H SCLCR/L-06	•	•	8	11	6	100	25					
S10K SCLCR/L-06	•	•	10	13	7	125	25					
A10K SCLCR/L-06	•	•	10	13	7	125	25					
S12K-SCLCR-06		•	12	12,5	7	125	25					
S12M SCLCR/L-06	•	•	12	16	9	150	30					
A12M SCLCR/L-06	•	•	12	16	9	150	30					
S16Q SCLCR/L-06	•	•	16	20	11	180	35					
A16Q SCLCR/L-06	•	•	16	20	11	180	35	CC.T 09T3..	-	-	SM3,5X8M	T15
S12M SCLCR/L-09	•	•	12	16	9	150	30					
A12M SCLCR/L-09	•	•	12	16	9	150	30					
S16Q SCLCR/L-09	•	•	16	20	11	180	35					
A16Q SCLCR/L-09	•	•	16	20	11	180	35					
S20R SCLCR/L-09	•	•	20	25	13	200	40					
A20R SCLCR/L-09	•	•	20	25	13	200	40					
S25S SCLCR/L-09	•	•	25	32	17	250	50					
S32T SCLCR/L-09	•	•	32	40	23	300	60					
S25S SCLCR/L-12	•	•	25	32	17	250	50				CC.T 1204..	
A25S SCLCR-12		•	25	32	17	250	50					
S32T SCLCR/L-12	•	•	32	40	23	300	60					
S40V SCLCR/L-12	•	•	40	50	27	400	70					

S TYPE TOOL HOLDER



DC**

S.../A...SDUCR/L

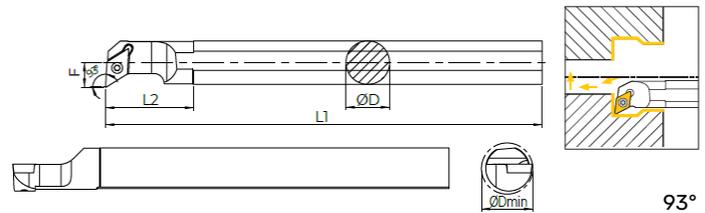


93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S10K SDUCR/L-07	•	•	10	13	7,5	125	25	DC.T 0702..	-	-	SM2,5X5	T08
A10K SDUCR/L-07	•	•	10	13	7,5	125	25					
S12M SDUCR/L-07	•	•	12	16	9	150	30					
A12M SDUCR/L-07	•	•	12	16	9	150	30					
S16Q SDUCR/L-07	•	•	16	20	11	180	35					
S20R SDUCR/L-07	•	•	20	25	13	200	40					
S25S SDUCR/L-07	•	•	25	32	17,5	250	50					
S16Q SDUCR/L-11	•	•	16	20	11	180	35	DC.T 11T3..	-	-	SM3,5X8	T15
A16Q SDUCR/L-11	•	•	16	20	11	180	35					
S20R SDUCR/L-11	•	•	20	25	13	200	40					
A20R SDUCR/L-11	•	•	20	25	13	200	40					
S25S SDUCR/L-11	•	•	25	32	17,5	250	50					
A25R SDUCR/L-11	•	•	25	32	17,5	200	50					
S32T SDUCR/L-11	•	•	32	40	23	300	60					
S40V SDUCR/L-11	•	•	40	50	27	400	60	SDC11SM	SS050535M	SM3,5X14		

S TYPE TOOL HOLDER



DC**

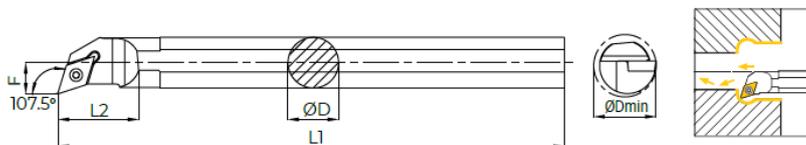


S.../A...SDQCR/L

107.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S10K SDQCR/L-07	•	•	10	13	7,5	125	25	DC.T 0702..	-	-	SM2,5X5	T08
A10K SDQCR-07		•	10	12	7,5	125	25					
S12M SDQCR/L-07	•	•	12	16	9	150	30					
A12M SDQCR-07		•	12	16	9	150	30					
S16Q SDQCR/L-07	•	•	16	20	11	180	35					
S20R SDQCR/L-07	•	•	20	25	13	200	40					
S25S SDQCR/L-07	•	•	25	32	17,5	250	50					
S16Q SDQCR/L-11	•	•	16	20	11	180	35	DC.T 11T3..	-	-	SM3,5X8	T15
A16Q SDQCR-11		•	16	20	11	180	35					
S20R SDQCR/L-11	•	•	20	25	13	200	40					
A20R SDQCR-11		•	20	25	13	200	40					
S25S SDQCR/L-11	•	•	25	32	17,5	250	50					
S32T SDQCR/L-11	•	•	32	40	23	300	60				SDC11SM	


S TYPE TOOL HOLDER

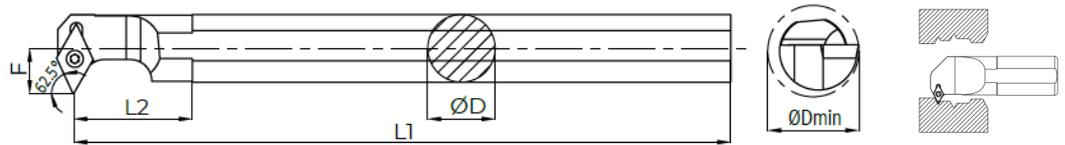

S...SD-CR/L

62.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S10K SD-CR/L-07	•	•	10	14	8,5	125	28	DC.T 0702..	-	-	SM2,5X5	T08
S12M SD-CR/L-07	•	•	12	16	9	150	30				SM2,5X7	
S16Q SD-CR/L-07	•	•	16	23	14	180	40				SM3,5X8	
S16Q SD-CR/L-11	•	•	16	23	14	180	40	DC.T 11T3..	-	-	SM3,5X10	T15
S20R SD-CR/L-11	•	•	20	25	14,5	200	45				SM3,5X14	
S25S SD-CR/L-11	•	•	25	32	19	250	55					
S32T SD-CR/L-11	•	•	32	40	23	300	60	SDC11SM	SS050535M	SM3,5X14		
S40V SD-CR/L-11	•	•	40	50	27	400	70					

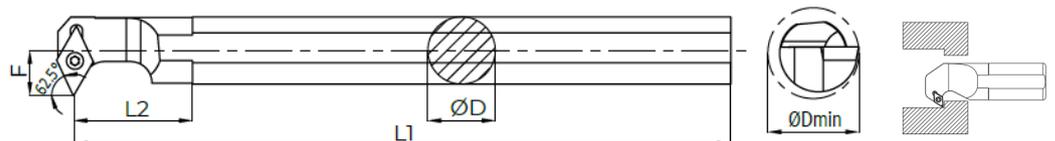


S...SDXCR/L

93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S12M SDXCR/L-07	•	•	12	16	9	150	30	DC.T 0702..	-	-	M2,5X5	T08
S16Q SDXCR/L-07	•	•	16	22	12,5	180	40				M2,5X7	
S16Q SDXCR/L-11	•	•	16	22	12,5	180	40				M3,5X8	
S20R SDXCR/L-11	•	•	20	25	14	200	55	DC.T 11T3..	-	-	M3,5X10	T15
S25S SDXCR/L-11	•	•	25	32	17,5	250	65					
S32T SDXCR/L-11	•	•	32	40	23	300	80				SDC11SM	
S40V SDXCR/L-11	•	•	40	50	27	400	80					


S TYPE TOOL HOLDER

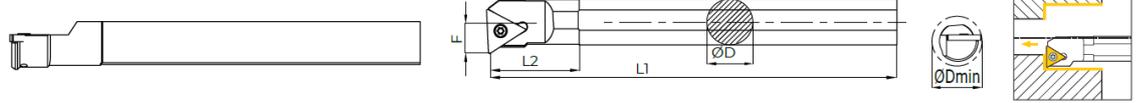

S...STFCR/L

90°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S12M STFCR-11		•	12	15,5	9	150	30	TC.T 11	-	-	M2,5X6	T08
S16Q STFCR/L-16	•	•	16	20	11	180	35	TC.T 16T3..	-	-	SM3,5X8	T15
S20R STFCR/L-16	•	•	20	25	13	200	40		STC165M	SS050535M	SM3,5X11	
S25S STFCR/L-16	•	•	25	32	17,5	250	50					
S32T STFCR/L-16	•	•	32	40	23	300	60					

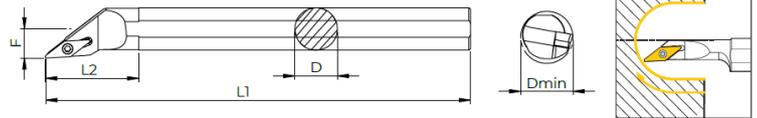

S...SVJBR/L

93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S25S SVJBR/L-16	•	•	25	32	17	250	50	VBM. 1604..	SVC16SM	SS050535M	SM3,5X11	T15
S32T SVJBR/L-16	•	•	32	40	23	300	80					
S40V SVJBR-16		•	40	50	27	400	80					

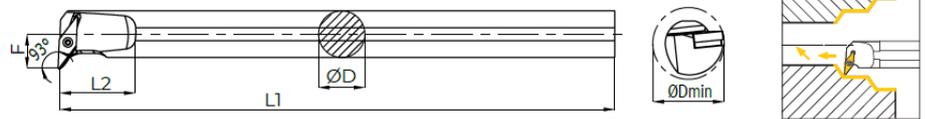

S...SVUBR/L

93°



Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S16Q SVUBR/L-11	•	•	16	20	11	180	40	VBM. 1103..	-	-	SM2,5X7	T08
S20R SVUBR/L-11	•	•	20	25	13	200	40					
S25S SVUBR/L-16	•	•	25	32	17	250	50	VBM. 1604..	SVB16SM	SS050535M	SM3,5X11	T15
S32T SVUBR/L-16	•	•	32	40	22	300	60					
S40V SVUBR/L-16	•	•	40	50	27	400	70					

S TYPE TOOL HOLDER



DC**

S...SVUCR/L

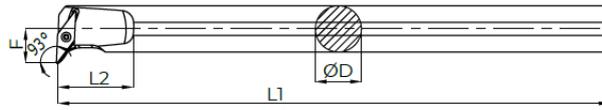



93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S16Q SVUCR/L-11	•	•	16	20	11	180	40	VCM. 1103..	-	-	SM2,5X7	T08
S20R SVUCR/L-11	•	•	20	25	13	200	40		-	-	SM2,5X7	T08
S25S SVUCR/L-16	•	•	25	32	17	250	50	VCM. 1604..	SVC16SM	SS050535M	SM3,5X11	T15
S32T SVUCR/L-16	•	•	32	40	22	300	60					
S40V SVUCR/L-16	•	•	40	50	27	400	70					



DC**

S...SDPCR/L

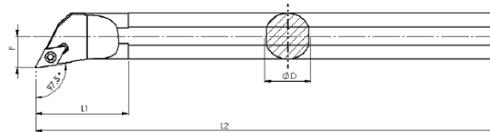

97.5°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts			
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Screw	Allen Key
S10K SDPCR/L-07	•	•	10	13	7,5	125	25	DC..T 0702	-	-	M2,5X5	T08
S12M SDPCR/L-07	•	•	12	16	9	150	30		-	-		
S16Q SDPCR/L-11	•	•	16	20	11	180	35	DC..T 11T3	-	-	M3,5X8	T15
S20R SDPCR/L-11	•	•	20	25	13	200	40		-	-		
S25S SDPCR/L-11	•	•	25	32	17,5	250	50		SDC11SM	SS050535M	M3,5X14	
S32T SDPCR/L-11	•	•	32	40	23	300	60					

C TYPE TOOL HOLDER



KN**

S...CKUNR/L

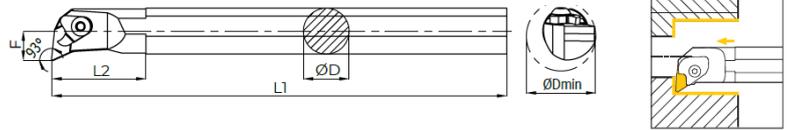

93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Clamp	Screw	Allen Key
S25S CKUNR/L-16	•	•	25	32	17	250	50	KNUX 1604	SKN16RCM SKN16LCM	SS0310M	CC0016M	CS0627M	A3
S32T CKUNR/L-16	•	•	32	40	22	300	60						
S40V CKUNR/L-16	•	•	40	50	27	400	65						
S50W CKUNR-16		•	50	63	35	450	70						
S50W CKUNR-16		•	60	75	40	450	70						

T TYPE TOOL HOLDER



CN**

S...TCLNR/L



95°



Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	H1 H	B	F	L1	L2		Shim	Shim Screw	Clamp	Clamp Screw	Allen Key
TCLNR/L 1616-H12	•	•	16	16	25	100	35	CNM. 1204..	SCN12TM	SS0410M	CT0012M	CS0627M	A3
TCLNR/L 2020-K12	•	•	20	20	25	125	35						
TCLNR/L 2525-M12	•	•	25	25	32	150	40						
TCLNR/L 3232-P12	•	•	32	32	40	170	40						
TCLNR/L 2525-M16	•	•	25	25	32	150	40	CNM. 1606..	SCN16TM	SS0510M	CT0016M	CS0627M	A3
TCLNR/L 3232-P16	•	•	32	32	40	170	40						
TCLNR/L 3232-P19	•	•	32	32	40	170	40	CNM. 1906..	SCN19TM	SS0510M	CT0019M	CS0825M	A5
TCLNR/L 4040-R19	•	•	40	40	50	200	45						

T TYPE TOOL HOLDER



DN**

S...TDQNR/L





107.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Clamp	Screw	Allen Key
S25S TDQNR/L-15	•	•	25	32	17	250	50	DNM. 1506..	SDN15TM	SS0410M	CT150105M	CS0627M	A3
S32T TDQNR/L-15	•	•	32	40	22	300	60						
S40V TDQNR/L-15	•	•	40	50	27	400	70						
S50W TDQNR/L-15	•	•	50	63	35	450	75						



DN**



S...TDUNR/L



93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Clamp	Screw	Allen Key
S20R TDUNR/L-11	•	•	20	25	13	200	40	DNM. 1104..	-	-	CT110105M	CS0523M	A3
S25S TDUNR/L-15	•	•	25	32	17	250	50	DNM. 1506..	SDN15TM	SS0410M	CT150105M	CS0627M	
S32T TDUNR/L-15	•	•	32	40	22	300	60						
S40V TDUNR/L-15	•	•	40	50	27	400	70						
S50W TDUNR/L-15	•	•	50	63	35	450	75						
S60W TDUNR/L-15	•	•	60	75	40	450	75						



T TYPE TOOL HOLDER

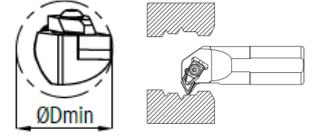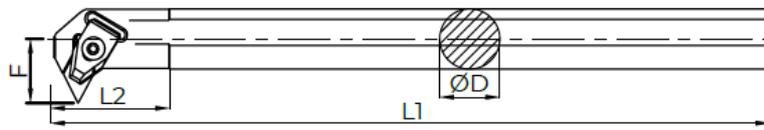

S...TD-NR/L

62.5°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Clamp	Screw	Allen Key
S32T TD-NR/L-15	•	•	32	43	26,5	300	60	DNM. 1506	SDN15TM	SS0410M	CT150105M	CS0627M	A3
S40V TD-NR/L-15	•	•	40	50	29,5	400	70						
S50W TD-NR-15		•	50	62	35	450	70						

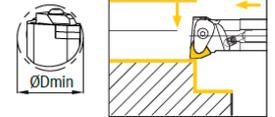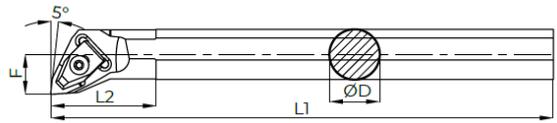

S...TWNLR/L

95°



Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Clamp	Screw	Allen Key
S20R TWLNR/L-06	•	•	20	25	13	200	40	WNM. 0602..	-	-	CT06105M	CS0520M	A3
A20R TWLNR/L-06	•	•	20	25	13	200	40						
S25S TWLNR/L-08	•	•	25	32	17	250	50	WNM. 0804..	SWN08TMM	SS0410M	CT080105M	CS0627M	
A25S TWLNR/L-08	•	•	25	32	17	250	50						
S32T TWLNR/L-08	•	•	32	40	22	300	60						
S40V TWLNR/L-08	•	•	40	50	27	400	70						
S50W TWLNR/L-08	•	•	50	63	35	450	75						
S60W TWLNR/L-08	•	•	60	75	40	450	75						

M TYPE TOOL HOLDER



TN**

S...MTUNR/L

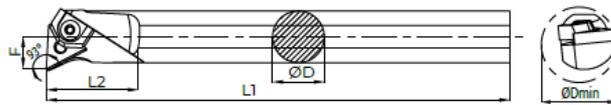



93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Shim Pim	Clamp	Screw	Allen Key
S20R MTUNR/L-16	•	•	20	25	13	200	40	TNM. 1604..	-	-	CM0016M	CS0515M	A3
S25S MTUNR/L-16	•	•	25	32	17	250	50		STN16TMM	SP0536125M		CS0523M	
S32T MTUNR/L-16	•	•	32	40	22	300	60			SP053615M			
S40V MTUNR/L-16	•	•	40	50	27	400	70						
S32T MTUNR/L-22	•	•	32	40	22	300	60	TNM. 2204..	STN22TMM	SP060515M	CM0022M	CS0627M	
S40V MTUNR/L-22	•	•	40	50	27	400	70						
S50W MTUNR/L-22	•	•	50	63	35	450	75						



TN**




S...MT-NR/L

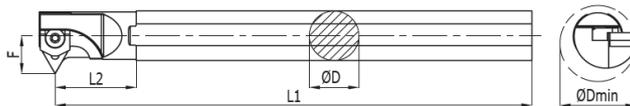

60°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Shim Pim	Clamp	Screw	Allen Key
S20R MT-NR/L-16	•	•	20	25	16	200	40	TNM. 1604..	-	SP0536125M	CM0016M	CS0515M	A3
S25S MT-NR/L-16	•	•	25	32	19,5	250	50		STN16TMM	SP053615M		CS0523M	
S32T MT-NR/L-16	•	•	32	40	23	300	60						
S40V MT-NR/L-16	•	•	40	50	29,5	400	70						
S32T MT-NR-22		•	32	40	23	300	55	TNM. 2204..	STN22TMM	SPTN22M	CM0022M	CS0627M	
S40V MT-NR-22		•	40	50	29,5	400	70						
S50W MT-NR-22	•	•	50	32	35	450	70						




M TYPE TOOL HOLDER



S...MWLNR/L

95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Shim Pim	Clamp	Screw	Allen Key
S16Q MWLNR/L-06	•	•	16	20	11	180	-5	WNM. 0604..	-	SP053615M	CM0006M	CS0515M	A3
S20R MWLNR/L-06	•	•	20	25	13	200	-5					CS06620M	
S25S MWLNR/L-08	•	•	25	32	17	250	-5	WNM. 0804..	SWN08TMM	SPWN08M	CM0008M	CS0627M	
S32T MWLNR/L-08	•	•	32	40	22	300	-5						
S40V MWLNR/L-08	•	•	40	50	27	400	-5						
S50W MWLNR/L-08	•	•	50	63	35	450	-5						

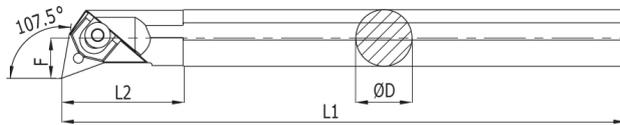

S...MTQNR/L

107.5°


Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts						
	L	R	D	Dmin	F	L1	L2		Shim	Shim Pim	Clamp	Screw	Allen Key		
S20R MTQNR/L-16	•	•	20	25	13	200	40	TNMG 1604	-	SP0536125M	CM0016M	CS515M	A3		
S25S MTQNR/L-16	•	•	25	32	17	250	50					CS523M			
S232T MTQNR/L-16	•	•	32	40	22	300	60					STN16MM		SP053615M	CS523M
S40V MTQNR/L-16	•	•	40	50	27	400	70					CS523M			
S32T MTQNR/L-22	•	•	32	40	22	300	60	TNMG 2204	STN22MM	SP06515M	CM0022M	CS627M			
S40V MTQNR/L-22	•	•	40	50	27	400	70					CS627M			

P TYPE TOOL HOLDER



CN**

S...PCLNR/L

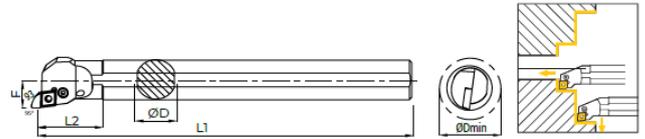


95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Metal Sheet	Screw	Lever	Allen Key
S25S PCLNR/L-12	•	•	25	32	17	250	50	CNM. 1204..	SCN12PM	SP012M	S00KM08M	LP012M	A3
S32T PCLNR/L-12	•	•	32	40	22	300	60						
S40V PCLNR/L-12	•	•	40	50	27	400	70						
S32T PCLNR-16		•	32	40	22	300	60	CNM. 1606..	SCN16PM	SP016M	S00KM08M	LP016M	A3
S40V PCLNR-16		•	40	50	27	400	70						
S40V PCLNR-19		•	40	50	27	400	70	CNM. 1906..	SCN19PM	SP019M	LP019M	A3	
S50W PCLNR-19		•	50	63	35	400	75						



DN**

S...PDUNR/L

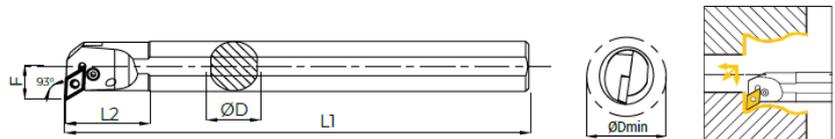




93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Metal Sheet	Screw	Lever	Allen Key
S25S PDUNR-15		•	25	32	17	250	50	DNM. 1506..	SDN15PM	SPM012M	S00KM8M	LP012M	A3
S32T PDUNR-15		•	32	40	22	300	60						
S40V PDUNR-15		•	40	50	27	400	70						
S50W PDUNR-15		•	50	63	35	450	75						

P TYPE TOOL HOLDER



TN**

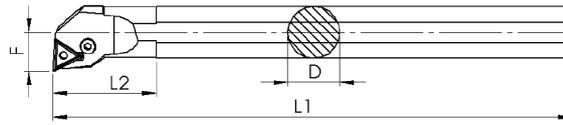




93°

S...PTUNR

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Metal Sheet	Screw	Lever	Allen Key
S20R-PTUNR-16		•	20	25	13	200	40	TNMG 1604	-	SP016M	S00KM8M	LP016M	A3
S25S PTUNR-16		•	25	32	17	250	50	TNMG 1604	STN16PM				
S32T PTUNR-16		•	32	40	22	300	60						
S32T PTUNR-22		•	32	40	22	300	60						
S40V PTUNR-22		•	40	50	27	400	70	TNM. 2204..	STN22PM	SP022M	S00KM8U	LP022M	
S50W-PTUNR-22		•	50	63	35	450	75						



TN**

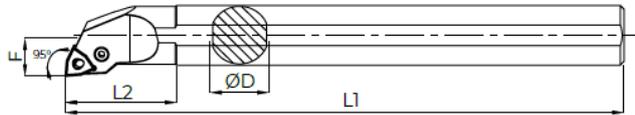

95°

S...PWLNR/L



Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts				
	L	R	D	Dmin	F	L1	L2		Shim	Metal Sheet	Screw	Lever	Allen Key
S25M PWLNR-08		•	25	32	17	250	50	WNM. 0804..	SWN08PM	SP008M	S00KM8M	LP012M	A3
S32P PWLNR-08		•	32	40	22	300	60						
S40R PWLNR-08		•	40	50	27	400	70						
S50W PWLNR-08		•	50	63	35	450	75						

ANTI-VIBRATION TOOLS



CC**

SCLCR/L




95°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts		
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Allen Key
C8H SCLCR/L-06	•	•	8	11	6	100	30	CC.T 0602	-	SM2,5X5	T08
C8K SCLCR/L-06	•	•	8	11	6	125	25				
C10K SCLCR-06		•	10	13	7	125	25				
A10K SCLCR/L-06	•	•	10	13	7	125	25				
C12K SCLCR-06	•	•	12	16	9	125	30				
A12K SCLCR/L-06	•	•	12	16	9	125	30				
C16Q-SCLCR-09		•	16	20	11	180	35	CC.T 09T3	-	SM3,5X8	T15
C18Q SCLCR/-09	•	•	18	20	11	180	35				
C20M SCLCR-09		•	20	25	13	150	40				
C20Q SCLCR-09		•	20	25	13	180	40				
A20Q SCLCR-09		•	20	25	13	180	40				



DC**

SDUCR/L



93°

Order Code	Stock Availability		Dimensions (mm)					Insert	Spare Parts		
	L	R	D	Dmin	F	L1	L2		Shim	Screw	Allen Key
C10K SDUCR-07		•	10	13	7,5	125	25	DC.T 0702	-	SM2,5X5	T08
A10K SDUCR/L-07	•	•	10	13	7,5	125	25				
C12K SDUCR/L-07	•	•	12	16	9	125	30				
A12K SDUCR/L-07	•	•	12	16	9	125	30				
C12M SDUCR-07		•	12	16	9	150	30				
C16K SDUCR-11		•	16	20	11	125	35	DC.T 11T3	-	SM3,5X8	T15
A16Q SDUCR/L-11	•	•	16	20	11	180	35				
C16Q SDUCR-11		•	16	20	11	180	35				
C18Q SDUCR-11		•	18	20	11	180	35				
C20K SDUCR-11		•	20	25	13	125	40				
C20Q SDUCR-11		•	20	25	13	180	40				
C20R SDUCR-11		•	20	25	13	200	40				

CERMET INSERTS
 NEGATIVE INSERTS

CNGG

Insert Shape	CB	Insert Code	ISO		Grades						
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)	
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CPM1	CNGG 120402R/L	0,20-2,0	0,08-0,25		●					○
		CNGG 120404R/L	0,24-2,4	0,10-0,25		●					○
		CNGG 120408R/L	0,26-2,6	0,10-0,28		□					□
	CPM2	CNGG 120402R/L	0,35-2,0	0,10-0,18	○			□	●		
		CNGG 120404R/L	0,50-2,5	0,12-0,20	○			□	●		
		CNGG 120408R/L	0,80-3,0	0,13-0,30	□		□	□			
	CTF	CNGG 120402R/L	0,30-1,2	0,10-0,20	○	●					
		CNGG 120404R/L	0,30-1,2	0,10-0,20	○	●					
		CNGG 120408R/L	0,50-1,2	0,10-0,20	□	□					

CNMG

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115
	CES	CNMG 120404	0,22-1,2	0,07-0,20		○	●		○	●
		CNMG 120408	0,25-1,5	0,10-0,22		○	●		○	●
	CEM	CNMG 120404	0,22-1,2	0,07-0,20	○	●		○	●	
		CNMG 120408	0,25-1,5	0,10-0,22	○	●		○	●	
	CM	CNMG 120404	0,24-2,4	0,10-0,25	○	●	□			□
		CNMG 120408	0,26-2,6	0,10-0,28	○	●	□			□

CERMET INSERTS

NEGATIVE INSERTS

DNGG

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CPM2	DNGG 150404R/L	0.50-2.5	0,12-0,20	○			□	●	
		DNGG 150408R/L	0,80-3,0	0,13-0,30	○			□	●	

DNMG

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CEF	DNMG 150404R/L	0,20-1,6	0,10-0,16	○	●		□	●	□
		DNMG 150408R/L	0,22-2,0	0,12-0,20	○	●		□	●	□
	CES	DNMG 150404	0,22-1,2	0,07-0,20		○	●		○	●
		DNMG 150408	0,25-1,5	0,10-0,22		○	●		○	●
	CEM	DNMG 150404	0,22-1,2	0,07-0,20	○	●		○	●	
		DNMG 150408	0,25-1,5	0,10-0,22	○	●		○	●	

CERMET INSERTS
 NEGATIVE INSERTS

SNGG

Insert Shape	CB	Insert Code	ISO		Grades						
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)	
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CPM1	SNGG 0902302R/L	0,20-2,0	0,08-0,25		●					○
		SNGG 090304R/L	0,24-2,4	0,10-0,25		●					○
		SNGG 120408R/L	0,26-2,6	0,10-0,28		●					○

TNGG

Insert Shape	CB	Insert Code	ISO		Grades						
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)	
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CPM1	TNGG 160402R/L	0,20-2,0	0,08-0,25		□					□
		TNGG 160404R/L	0,24-2,4	0,10-0,25		●					○
		TNGG 160408R/L	0,26-2,6	0,10-0,28		●					○
	CPM	TNGG 160402R/L	0,35-2,0	0,10-0,18	○			□	●		
		TNGG 160404R/L	0,50-2,5	0,12-0,20	○			□	●		
	CTF	TNGG 160402R/L	0,30-1,2	0,10-0,20	○	●					
		TNGG 160404R/L	0,30-1,2	0,10-0,20	○	●					

CERMET INSERTS

NEGATIVE INSERTS

TNMG

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115
	CEF	TNMG 160404R/L	0,20-1,6	0,10-0,16	○	●		□	●	□
		TNMG 160408R/L	0,22-2,0	0,12-0,20	○	●		□	●	□
	CES	TNMG 160404	0,22-1,2	0,07-0,20		○	●		○	●
		TNMG 160408	0,25-1,5	0,10-0,22		○	●		○	●
	CEM	TNMG 160404	0,22-1,2	0,07-0,20	○	●		○	●	
		TNMG 160408	0,25-1,5	0,10-0,22	○	●		○	●	
	CM	TNMG 160404	0,24-2,4	0,10-0,25	○	●	□			□
		TNMG 160408	0,26-2,6	0,10-0,28	○	●	□			□
	CPM1	TNMG 160404R/L	0,24-2,4	0,10-0,25		●				○
		TNMG 160408R/L	0,26-2,6	0,10-0,28		●				○

CERMET INSERTS

NEGATIVE INSERTS

CCGT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CL2	CCGT 060202R/L	0,20-1,0	0,05-0,18		●		□	●	
		CCGT 060204R/L	0,22-1,2	0,07-0,20		●		□	●	
		CCGT 09T302R/L	0,25-1,5	0,10-0,22		●		□	●	
		CCGT 09T304R/L	0,22-1,2	0,07-0,20		●		□	●	
	CPF1	CCGT 060202R/L	0,20-2,0	0,08-0,25	●	○	□			
		CCGT 060204R/L	0,24-2,4	0,10-0,25	●	○	□			
		CCGT 09T302R/L	0,26-2,6	0,10-0,28	●	○	□			
		CCGT 09T304R/L	0,24-2,4	0,10-0,25	●	○	□			
	CLH	CCGT 060202R/L	0,20-2,0	0,08-0,25		□	○	●		
		CCGT 060204R/L	0,24-2,4	0,10-0,25		□	○	●		
		CCGT 09T302R/L	0,26-2,6	0,10-0,28		□	○	●		
		CCGT 09T304R/L	0,24-2,4	0,10-0,25		□	○	●		

CERMET INSERTS
NEGATIVE INSERTS

CCMT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115
	CPF1	CCMT 060202	0,20-2,0	0,08-0,25	●	○	□			
		CCMT 060204	0,24-2,4	0,10-0,25	●	○	□			
		CCMT 09T302	0,26-2,6	0,10-0,28	●	○	□			
		CCMT 09T304	0,24-2,4	0,10-0,25	●	○	□			
		CCMT 09T308	0,26-2,6	0,10-0,28	●	○	□			
	CF1	CCMT 060202	0,50-2,00	0,06-0,12		●	●		□	□
		CCMT 060204	0,50-2,00	0,08-0,22		●	●		□	□
		CCMT 09T302	0,50-2,00	0,10-0,25		●	●		□	□
		CCMT 09T304	0,50-2,00	0,08-0,22		●	●		□	□
		CCMT 09T308	0,50-2,00	0,10-0,25		●	●		□	□
	CMT	CCMT 060202	0,35-2,0	0,10-0,18	□		○		●	●
		CCMT 060204	0,50-2,5	0,12-0,20	□		○		●	●
		CCMT 09T302	0,80-3,0	0,13-0,30	□		○		●	●
		CCMT 09T304	0,50-2,5	0,12-0,20	□		○		●	●
		CCMT 09T308	0,80-3,0	0,13-0,30	□		○		●	●

CERMET INSERTS

NEGATIVE INSERTS

DCGT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CL2	DCGT 070202R/L	0,20-1,0	0,05-0,18		●		□	●	
		DCGT 070204R/L	0,22-1,2	0,07-0,20		●		□	●	
		DCGT 11T302R/L	0,20-1,0	0,05-0,18		●		□	●	
		DCGT 11T304R/L	0,22-1,2	0,07-0,20		●		□	●	
	CP1	DCGT 070202R/L	0,20-2,0	0,08-0,25	●	○	□			
		DCGT 070204R/L	0,24-2,4	0,10-0,25	●	○	□			
		DCGT 070208R/L	0,26-2,6	0,10-0,28	●	○	□			
		DCGT 11T302R/L	0,20-2,0	0,08-0,25	●	○	□			
		DCGT 11T304R/L	0,24-2,4	0,10-0,25	●	○	□			
	CLH	DCGT 11T302R/L	0,20-2,0	0,08-0,25		□	○	●		
		DCGT 11T304R/L	0,24-2,4	0,10-0,25		□	○	●		

CERMET INSERTS

NEGATIVE INSERTS

DCMT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
					fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115
	CFG	DCMT 070204	0,20-1,6	0,10-0,16		□	●	○	□	●
		DCMT 11T304	0,20-1,6	0,10-0,16		□	●	○	□	●
		DCMT 11T308	0,22-2,0	0,12-0,20			●			●
	CF1	DCMT 070202	0,50-2,00	0,06-0,12		●	●		□	□
		DCMT 070204	0,50-2,00	0,08-0,22		●	●		□	□
		DCMT 070208	0,50-2,00	0,10-0,25		●	●		□	□
		DCMT 11T302	0,50-2,00	0,06-0,12		●	●		□	□
		DCMT 11T304	0,50-2,00	0,08-0,22		●	●		□	□
		DCMT 11T308	0,50-2,00	0,10-0,25		●	●			

CERMET INSERTS

POSITIVE INSERTS

TBGT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CL2	TBGT 060102L	0,20-1,0	0,05-0,18		●		□	●	
		TBGT 060104L	0,22-1,2	0,07-0,20		●		□	●	
		TBGH 060102L	0,10-1,5	0,08-0,15		●		□	●	
		TBGH 060104L	0,20-1,6	0,10-0,16		●		□	●	

TCGT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CL2	TCGT 110202L	0,20-1,0	0,05-0,18		●		□	●	
		TCGT 110204L	0,22-1,2	0,07-0,20		●		□	●	
		TCGT 16T302L	0,22-1,2	0,07-0,20		●			●	
		TCGT 16T304L	0,25-1,5	0,10-0,22		●			●	

CERMET INSERTS

POSITIVE INSERTS

TCMT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CPF1	TCMT 090202	0,20-2,0	0,08-0,25	●	○	□			
		TCMT 090204	0,24-2,4	0,10-0,25	●	○	□			
		TCMT 110202	0,20-2,0	0,08-0,25	●	○	□			
		TCMT 110204	0,24-2,4	0,10-0,25	●	○	□			
		TCMT 110208	0,26-2,6	0,10-0,28	●	○	□			
		TCMT 110302	0,20-2,0	0,08-0,25	●					
		TCMT 110304	0,24-2,4	0,10-0,25	●					
		TCMT 110308	0,26-2,6	0,10-0,28	●					
		TCMT 16T304	0,24-2,4	0,10-0,25	●					
		TCMT 16T308	0,26-2,6	0,10-0,28	●					
	CFI	TCMT 090202	0,50-2,00	0,06-0,12		●	●		□	□
		TCMT 090204	0,50-2,00	0,08-0,22		●	●		□	□
		TCMT 110202	0,50-2,00	0,06-0,12		●	●		□	□
		TCMT 110204	0,50-2,00	0,08-0,22		●	●		□	□
		TCMT 110208	0,50-2,00	0,10-0,25		●	●		□	□
		TCMT 110302	0,50-2,00	0,06-0,12		●	●			
		TCMT 110304	0,50-2,00	0,08-0,22		●	●			
		TCMT 110308	0,50-2,00	0,10-0,25		●	●			
		TCMT 16T304	0,50-2,00	0,08-0,22		●	●			
		TCMT 16T308	0,50-2,00	0,10-0,25		●	●			
	CMT	TCMT 110204	0,50-2,5	0,12-0,20	□		○		●	●
		TCMT 16T304	0,50-2,5	0,12-0,20	□		○		●	●

● Stock item

○ Non Stock item

△ Special order

CERMET INSERTS

POSITIVE INSERTS

TPGT


Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CLF	TPGT 090202	0,30-1,2	0,10-0,20			□	●		
		TPGT 090204	0,30-1,2	0,10-0,20			□	●		
		TPGT 110302	0,30-1,2	0,10-0,20				●		
		TPGT 110304	0,30-1,2	0,10-0,20				●		
		TPGT 110308	0,50-1,2	0,10-0,20				●		

TPMT

Insert Shape	CB	Insert Code	ISO		Grades					
			ap (mm)	Vc (m/min)	350 (100-600)	300 (100-500)	250 (100-400)	220 (90-350)	300 (100-500)	250 (100-400)
				fn (mm/rev)	CN7610	CN7115	CN7120	CN7130	CP5115	CP1120
	CAL1	TPMT 110302	0,10-1,5	0,08-0,15		○	○	○	○	○
		TPMT 110304	0,20-1,6	0,10-0,16		□	●	○	□	●
		TPMT 110308	0,22-2,0	0,12-0,20		○	○	○	○	○
	CFI	TPMT 110302	0,50-2,00	0,06-0,12		●	●		□	□
		TPMT 110304	0,50-2,00	0,08-0,22		●	●			
		TPMT 110308	0,50-2,00	0,10-0,25		●	●			

CBN INSERTS

Negative 80°(CN)




Type	Dimensions (mm)			
	d	s	la	d1
CN_1204_	12,7	4,76	3,0	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	CNGA 120402 S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	CNGA 120404 S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	CNGA 120408 S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	CNGA 120412 S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	2C-CNGA 120402 S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-CNGA 120404 S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-CNGA 120408 S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-CNGA 120412 S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	4C-CNGA 120402 S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	4C-CNGA 120404 S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	4C-CNGA 120408 S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	4C-CNGA 120412 S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Negative 55°(DN)

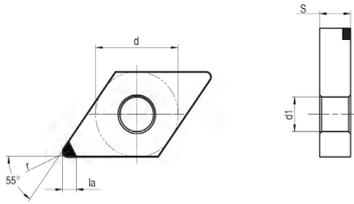


Dimensions (mm)				
Type	d	s	la	d1
DN_1504_	12,7	4,76	3,0	5,16
DN_1506_	12,7	6,35	3,0	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	DNGA 150402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	DNGA 150404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150602-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150604-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150608-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	DNGA 150612-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●

CBN INSERTS

Negative 55°(DN)

Negative 55° (DN)

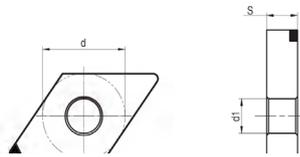

Dimensions (mm)				
Type	d	s	la	d1
DN_1504_	12,7	4,76	3,0	5,16
DN_1506_	12,7	6,35	3,0	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	2C-DNGA 150402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-DNGA 150404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150602-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150604-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150608-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-DNGA 150612-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	4C-DNGA 150402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150602-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150604-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150608-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	4C-DNGA 150612-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○


● Stock item

○ Non Stock item

△ Special order

CBN INSERTS

Negative 90°(SN)

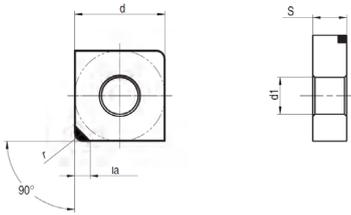


Dimensions (mm)				
Type	d	s	la	d1
SN_1204_	12,7	4,76	3,0	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	SNGA 120402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	SNGA 120404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	SNGA 120408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	SNGA 120412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	4C-SNGA 120402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	4C-SNGA 120404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	4C-SNGA 120408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	4C-SNGA 120412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	8C-SNGA 120402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	8C-SNGA 120404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	8C-SNGA 120408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	8C-SNGA 120412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Negative 60°(TN)

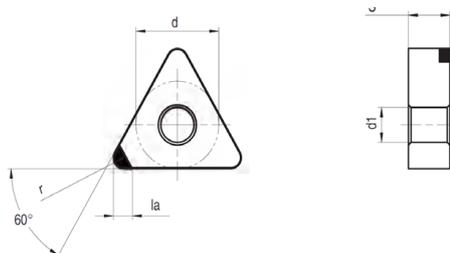


Dimensions (mm)				
Type	d	s	la	d1
TN_1604_	9,5	4,76	3,0	3,81

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	TNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	TNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	TNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	TNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	3C-TNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	3C-TNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	3C-TNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	3C-TNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	6C-TNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	6C-TNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	6C-TNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	6C-TNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Negative 35°(VN)

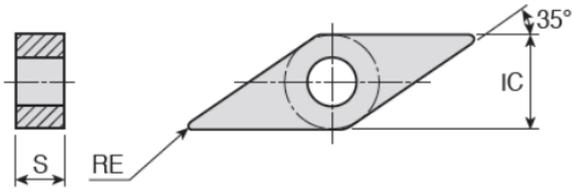


Dimensions (mm)				
Type	d	s	la	d1
VN_1604_	9,5	4,76	3,0	3,81

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	VNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	VNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	VNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	VNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	2C-VNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-VNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-VNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-VNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○
	4C-VNGA 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	4C-VNGA 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	4C-VNGA 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	4C-VNGA 160412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Negative 80°(WN)

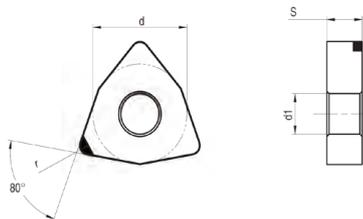


Dimensions (mm)				
Type	d	s	la	d1
WN_0804	12,7	4,76	3,0	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	WNGA 080402-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	WNGA 080404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	WNGA 080408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	WNGA 080412-S01020	1,2	0.03-0.3	0.05-0.5	●	●	●
	3C-WNGA 080402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	3C-WNGA 080404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	3C-WNGA 080408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	3C-WNGA 080412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○
	6C-WNGA 080402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	6C-WNGA 080404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	6C-WNGA 080408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	6C-WNGA 080412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Positive 80°(CC)

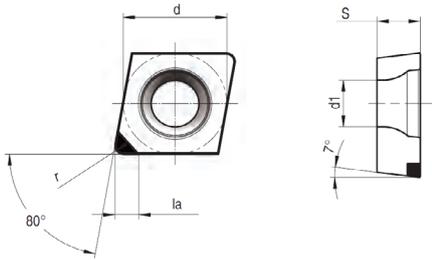


Type	Dimensions (mm)			
	d	s	la	d1
CC_0602_	6,4	2,38	3,0	2,80
CC_09T3_	9,52	3,97	3,0	4,4
CC_1204_	12,7	4,76	3,0	5,50

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	CCGW 060202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	CCGW 060204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	CCGW 060208-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	CCGW 09T302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	CCGW 09T304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	CCGW 09T308-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	CCGW 120402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	CCGW 120404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	CCGW 120408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	CCGW 120412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○
	2C-CCGW 060202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 060204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 060208-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 09T302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 09T304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 09T308-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-CCGW 120402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-CCGW 120404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	2C-CCGW 120408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	2C-CCGW 120412-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Positive 55°(DC)

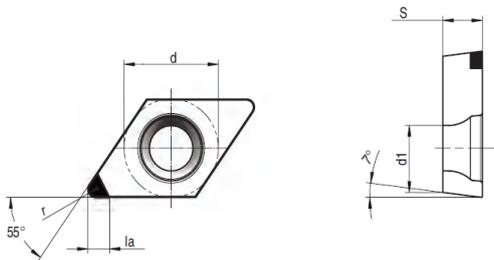


Dimensions (mm)				
Type	d	s	la	d1
DC_0702_	6,4	2,38	3,0	2,80
DC_11T3_	9,52	3,97	3,0	4,4

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	DCGW 070202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	DCGW 070204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	DCGW 070208-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	DCGW 11T302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	DCGW 11T304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	DCGW 11T308-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	DCGW 11T312-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○
	2C-DCGW 070202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 070204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 070208-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 11T302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 11T304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 11T308-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-DCGW 11T312-S01020	1,2	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Positive 60°(TP)

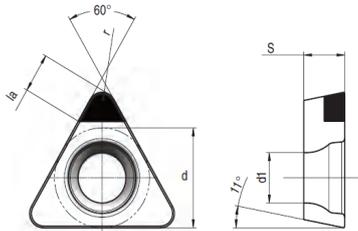


Dimensions (mm)				
Type	d	s	la	d1
TP_0802_	4,8	2,38	3,0	2,40
TP_0902_	5,56	2,38	3,0	2,8
TP_1103_	6,35	3,18	3,0	3,3
TP_1604_	9,5	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	TPGW 080202-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	TPGW 080204-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	TPGW 090202-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	TPGW 090204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	TPGW 090208-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	TPGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	TPGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	TPGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	TPGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	TPGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	3C-TPGW 080202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 080204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 090202-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 090204-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 090208-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	3C-TPGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	3C-TPGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	3C-TPGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Positive 35°(V)

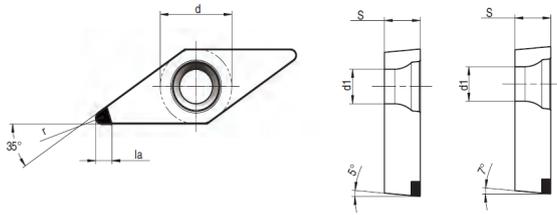


Type	Dimensions (mm)			
	d	s	la	d1
VB_1103_	6,35	3,18	3,0	2,80
VC_1103_	6,35	3,18	3,0	2,80
VB_1604_	9,52	4,76	3,0	4,40
VC_1604_	9,52	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	VBGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	VBGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	VBGW 110308-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	VBGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	VBGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	VBGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-VBGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-VBGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	2C-VBGW 110308-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	2C-VBGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-VBGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	2C-VBGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○

CBN INSERTS

Positive 35°(V)

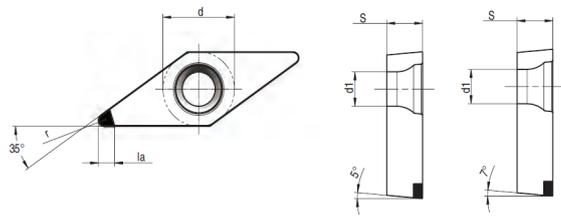


Dimensions (mm)				
Type	d	s	la	d1
VB_1103_	6,35	3,18	3,0	2,80
VC_1103_	6,35	3,18	3,0	2,80
VB_1604_	9,52	4,76	3,0	4,40
VC_1604_	9,52	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grades		
			f (mm/rev)	ap (mm)	BN7405	BN7415	BN7208
	VCGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	VCGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	VCGW 110308-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	VCGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	●	●	●
	VCGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	●	●	●
	VCGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	●	●	●
	2C-VCGW 110302-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-VCGW 110304-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	2C-VCGW 110308-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○
	2C-VCGW 160402-S01020	0,2	0.03-0.3	0.05-0.5	○	○	○
	2C-VCGW 160404-S01020	0,4	0.03-0.3	0.05-0.5	○	○	○
	2C-VCGW 160408-S01020	0,8	0.03-0.3	0.05-0.5	○	○	○


CBN INSERTS

Solid CBN


CNGG

Inserts	Insert Code	Dimensions (mm)			Grades	
		I.C.	T	r	BS7204	BP2204
	CNGN 120408	12,70	4,76	0,8	●	○
	CNGN 120412	12,70	4,76	1,2	●	○

SNGN

Inserts	Insert Code	Dimensions (mm)			Grades	
		I.C.	T	r	BS7204	BP2204
	SNGN 090304	9,53	3,18	0,4	○	○
	SNGN 090308	9,53	3,18	0,8	○	○
	SNGN 120404	12,70	4,76	0,4	○	○
	SNGN 120408	12,76	4,76	0,8	●	○
	SNGN 120412	12,76	4,76	1,2	●	○

TNGN

Inserts	Insert Code	Dimensions (mm)			Grades	
		I.C.	T	r	BS7204	BP2204
	TNGN 160408	9,525	4,76	0,8	●	○
	TNGN 160412	9,525	4,76	1,2	●	○

CBN INSERTS

Solid CBN

RNGG

Inserts	Insert Code	Dimensions (mm)			Grades		
		I.C.	s	r	BS7404	BS7204	BP2204
	RNGN 060300	6,35	3,18		○	○	○
	RNGN 090300	9,525	3,18		○	○	○
	RNGN 090400	9,525	4,76		○	○	○
	RNGN 120300	12,70	3,18		○	○	○
	RNGN 120400	12,70	4,76		○	○	○

RCGX

Inserts	Insert Code	Dimensions (mm)				Grades		
		I.C.	t	s	α	BN7405	BN7415	BN7208
	RCGX 060300	6,35	3,18	3,32	140°	●	●	○
	RCGX 090300	9,525	3,18	3,32	140°	●	●	○
	RCGX 090700	9,525	7,7	7,94	120°	○	○	○
	RCGX 120400	12,70	4,76	4,94	140°	●	●	○
	RCGX 120700	12,70	7,7	7,94	140°	○	○	○
	RCGX 191000	19,05	9,77	10	120°	○	○	○


Full Face CBN

RCGX

Inserts	Insert Code	Dimensions (mm)				Grades		
		I.C.	t	T	α	BS7404	BS7204	BP2204
	RCGX 060300	6,35	3,18	3,32	140°	●	●	○
	RCGX 090300	9,525	3,18	3,32	140°	●	●	○
	RCGX 090700	9,525	7,7	7,94	120°	●	○	○
	RCGX 120400	12,70	4,76	4,94	140°	●	●	○
	RCGX 120700	12,70	7,7	7,94	140°	●	○	○
	RCGX 191000	19,05	9,77	10	120°	○	○	○

PCD INSERTS


Negative 80°(CN)

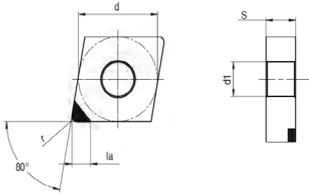

Dimensions (mm)				
Type	d	s	la	d1
CN_1204_	12,7	4,76	3	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grade
			f (mm/rev)	ap (mm)	
	CNGA 120402	0,2	0.03-0.2	0.05-0.5	○
	CNGA 120404	0,4	0.03-0.2	0.05-0.5	●
	CNGA 120408	0,8	0.03-0.2	0.05-0.5	●
	2C-CNGA 120402	0,2	0.03-0.2	0.05-0.5	○
	2C-CNGA 120404	0,4	0.03-0.2	0.05-0.5	●
	2C-CNGA 120408	0,8	0.03-0.2	0.05-0.5	●

Negative 55°(DN)

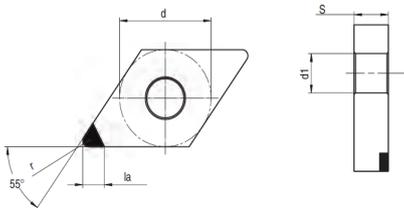


Dimensions (mm)				
Type	d	s	la	d1
DN_1504_	12,7	4,76	3	5,16

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grade
			f (mm/rev)	ap (mm)	
	DNGA 150402	0,2	0.03-0.2	0.05-0.5	●
	DNGA 150404	0,4	0.03-0.2	0.05-0.5	●
	DNGA 150408	0,8	0.03-0.2	0.05-0.5	●
	2C-DNGA 150402	0,2	0.03-0.2	0.05-0.5	○
	2C-DNGA 150404	0,4	0.03-0.2	0.05-0.5	○
	2C-DNGA 150408	0,8	0.03-0.2	0.05-0.5	○

PCD INSERTS


Negative 60°(TN)

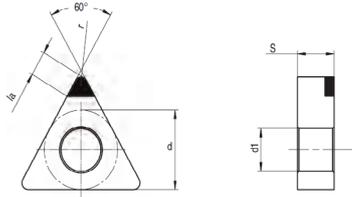

Dimensions (mm)				
Type	d	s	la	d1
TN_1604_	9,52	4,76	3	3,81

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grade
			f (mm/rev)	ap (mm)	
	TNGA 160402	0,2	0.03-0.2	0.05-0.5	●
	TNGA 160404	0,4	0.03-0.2	0.05-0.5	●
	TNGA 160408	0,8	0.03-0.2	0.05-0.5	●
	3C-TNGA 160402	0,2	0.03-0.2	0.05-0.5	○
	3C-TNGA 160404	0,4	0.03-0.2	0.05-0.5	○
	3C-TNGA 160408	0,8	0.03-0.2	0.05-0.5	○

Negative 35°(VN)

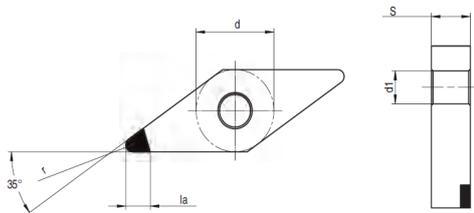


Dimensions (mm)				
Type	d	s	la	d1
VN_1604_	9,525	4,76	3	3,81

Inserts	Insert Code	r (mm)	Recommended Cutting Parameters		Grade
			f (mm/rev)	ap (mm)	
	VNGA 160402	0,2	0.03-0.2	0.05-0.5	●
	VNGA 160404	0,4	0.03-0.2	0.05-0.5	●
	VNGA 160408	0,8	0.03-0.2	0.05-0.5	●
	2C-VNGA 160402	0,2	0.03-0.2	0.05-0.5	○
	2C-VNGA 160404	0,4	0.03-0.2	0.05-0.5	○
	2C-VNGA 160408	0,8	0.03-0.2	0.05-0.5	○

PCD INSERTS

Positive 80°(CC)

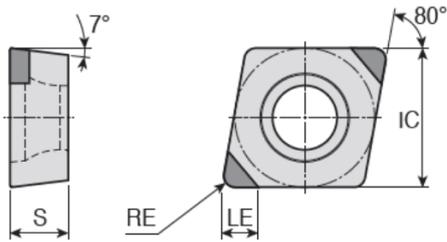


Dimensions (mm)				
Type	d	s	la	d1
CC_0602_	6,35	2,38	3	2,8
CC_09T3_	9,5	3,97	3,0	4,40
CC_1204_	12,7	4,76	3	5,5

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	
	CCGW 060202	0,2	7°	0.03-0.2	0.05-0.5	●
	CCGW 060204	0,4	7°	0.03-0.2	0.05-0.5	●
	CCGW 060208	0,8	7°	0.03-0.2	0.05-0.5	●
	CCGW 09T302	0,2	7°	0.03-0.2	0.05-0.5	●
	CCGW 09T304	0,4	7°	0.03-0.2	0.05-0.5	●
	CCGW 09T308	0,8	7°	0.03-0.2	0.05-0.5	●
	CCGW 120402	0,2	7°	0.03-0.2	0.05-0.5	○
	CCGW 120404	0,4	7°	0.03-0.2	0.05-0.5	○
	CCGW 120408	0,8	7°	0.03-0.2	0.05-0.5	○
	2C-CCGW 060202	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 060204	0,4	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 060208	0,8	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 09T302	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 09T304	0,4	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 09T308	0,8	7°	0.03-0.2	0.05-0.5	●
	2C-CCGW 120402	0,2	7°	0.03-0.2	0.05-0.5	○
	2C-CCGW 120404	0,4	7°	0.03-0.2	0.05-0.5	○
	2C-CCGW 120408	0,8	7°	0.03-0.2	0.05-0.5	○

PCD INSERTS

Positive 55°(DC)

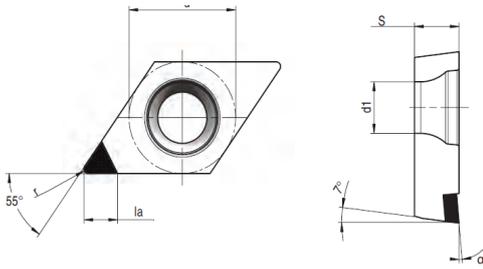


Dimensions (mm)				
Type	d	s	la	d1
DC_0702_	6,35	2,38	3	2,8
DC_11T3_	9,5	3,97	3,0	4,40

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	
	DCGW 070202	0.2	7°	0.03-0.2	0.05-0.5	●
	DCGW 070204	0.4	7°	0.03-0.2	0.05-0.5	●
	DCGW 070208	0.8	7°	0.03-0.2	0.05-0.5	●
	DCGW 11T302	0.2	7°	0.03-0.2	0.05-0.5	●
	DCGW 11T304	0.4	7°	0.03-0.2	0.05-0.5	●
	DCGW 11T308	0.8	7°	0.03-0.2	0.05-0.5	●
	2C-DCGW 070202	0.2	7°	0.03-0.2	0.05-0.5	○
	2C-DCGW 070204	0.4	7°	0.03-0.2	0.05-0.5	○
	2C-DCGW 070208	0.8	7°	0.03-0.2	0.05-0.5	○
	2C-DCGW 11T302	0.2	7°	0.03-0.2	0.05-0.5	○
	2C-DCGW 11T304	0.4	7°	0.03-0.2	0.05-0.5	○
	2C-DCGW 11T308	0.8	7°	0.03-0.2	0.05-0.5	○

PCD INSERTS

Positive 60°(T)

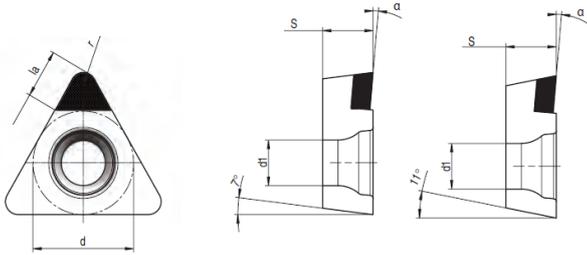


Type	Dimensions (mm)			
	d	s	la	d1
TC_0802_	4,76	2,38	3	2,4
TC_1103_	6,4	3,18	3,0	2,80
TC_16T3_	9,5	3,97	2,5	4,40
TP_0802_	4,76	2,38	3	2,4
TP_1102_	6,35	2,38	4	2,8
TP_1103_	6,35	3,18	4	3,4
TP_1604_	9,5	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	DN7505
	TCGW 080202	0,2	7°	0.03-0.2	0.05-0.5	○
	TCGW 080204	0,4	7°	0.03-0.2	0.05-0.5	○
	TCGW 080208	0,8	7°	0.03-0.2	0.05-0.5	○
	TCGW 110202	0,2	7°	0.03-0.2	0.05-0.5	●
	TCGW 110204	0,4	7°	0.03-0.2	0.05-0.5	●
	TCGW 110302	0,2	7°	0.03-0.2	0.05-0.5	●
	TCGW 110304	0,4	7°	0.03-0.2	0.05-0.5	●
	TCGW 110308	0,8	7°	0.03-0.2	0.05-0.5	●
	TCGW 16T302	0,2	7°	0.03-0.2	0.05-0.5	●
	TCGW 16T304	0,4	7°	0.03-0.2	0.05-0.5	●
TCGW 16T308	0,8	7°	0.03-0.2	0.05-0.5	●	
	3C-TCGW 080202	0,2	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 080204	0,4	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 080208	0,8	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 110302	0,2	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 110304	0,4	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 110308	0,8	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 16T302	0,2	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 16T304	0,4	7°	0.03-0.2	0.05-0.5	○
	3C-TCGW 16T308	0,8	7°	0.03-0.2	0.05-0.5	○

PCD INSERTS

Positive 60°(T)

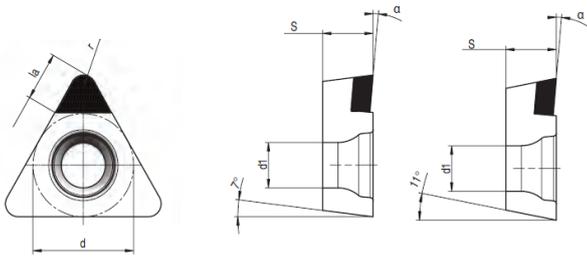


Dimensions (mm)				
Type	d	s	la	d1
TC_0802_	4,76	2,38	3	2,4
TC_1103_	6,4	3,18	3,0	2,80
TC_16T3_	9,5	3,97	2,5	4,40
TP_0802_	4,76	2,38	3	2,4
TP_1102_	6,35	2,38	4	2,8
TP_1103_	6,35	3,18	4	3,4
TP_1604_	9,5	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	DN7505
	TPGW 080202	0,2	11°	0.03-0.2	0.05-0.5	●
	TPGW 080204	0,4	11°	0.03-0.2	0.05-0.5	●
	TPGW 110202	0,2	11°	0.03-0.2	0.05-0.5	●
	TPGW 110204	0,4	11°	0.03-0.2	0.05-0.5	●
	TPGW 110304	0,4	11°	0.03-0.2	0.05-0.5	●
	TPGW 110308	0,8	11°	0.03-0.2	0.05-0.5	●
	TPGW 160302	0,2	11°	0.03-0.2	0.05-0.5	●
	TPGW 160304	0,4	11°	0.03-0.2	0.05-0.5	●
	3C-TPGW 080202	0,2	11°	0.03-0.2	0.05-0.5	○
	3C-TPGW 080204	0,4	11°	0.03-0.2	0.05-0.5	○
	3C-TPGW 080208	0,8	11°	0.03-0.2	0.05-0.5	○
	3C-TPGW 160402	0,2	11°	0.03-0.2	0.05-0.5	○
	3C-TPGW 160404	0,4	11°	0.03-0.2	0.05-0.5	○
	3C-TPGW 160408	0,8	11°	0.03-0.2	0.05-0.5	○

PCD INSERTS

Positive 35°(V)

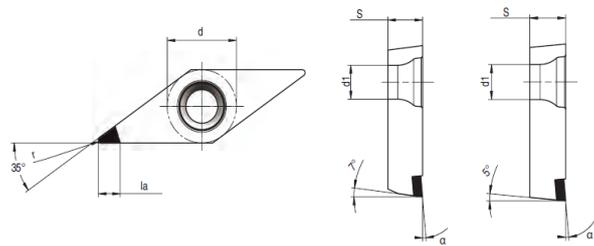


Dimensions (mm)				
Type	d	s	la	d1
VB_1103_	6,35	3,18	3,0	2,80
VB_1604_	9,5	4,76	3,0	4,40
VC_1103_	6,35	3,18	3,0	2,80
VC_1604_	9,5	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	
	VBGW 110302	0,2	5°	0.03-0.2	0.05-0.5	●
	VBGW 110304	0,4	5°	0.03-0.2	0.05-0.5	●
	VBGW 110308	0,8	5°	0.03-0.2	0.05-0.5	●
	VBGW 160402	0,2	5°	0.03-0.2	0.05-0.5	●
	VBGW 160404	0,4	5°	0.03-0.2	0.05-0.5	●
	VBGW 160408	0,8	5°	0.03-0.2	0.05-0.5	●
	2C-VBGW 110302	0,2	5°	0.03-0.2	0.05-0.5	○
	2C-VBGW 110304	0,4	5°	0.03-0.2	0.05-0.5	○
	2C-VBGW 110308	0,8	5°	0.03-0.2	0.05-0.5	○
	2C-VBGW 160402	0,2	5°	0.03-0.2	0.05-0.5	●
	2C-VBGW 160404	0,4	5°	0.03-0.2	0.05-0.5	●
	2C-VBGW 160408	0,8	5°	0.03-0.2	0.05-0.5	●

PCD INSERTS

Positive 35°(V)

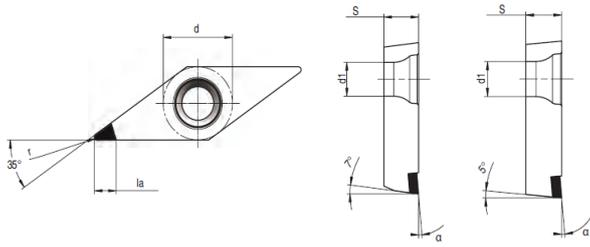

Dimensions (mm)				
Type	d	s	la	d1
VB_1103_	6,35	3,18	3,0	2,80
VB_1604_	9,5	4,76	3,0	4,40
VC_1103_	6,35	3,18	3,0	2,80
VC_1604_	9,5	4,76	3,0	4,40

Inserts	Insert Code	r (mm)	α (°)	Recommended Cutting Parameters		Grade
				f (mm/rev)	ap (mm)	
	VCGW 110302	0,2	7°	0.03-0.2	0.05-0.5	●
	VCGW 110304	0,4	7°	0.03-0.2	0.05-0.5	●
	VCGW 160404	0,4	7°	0.03-0.2	0.05-0.5	●
	VCGW 160408	0,8	7°	0.03-0.2	0.05-0.5	●
	VCGW 160412	1,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 110302	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 110304	0,4	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 110308	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 160402	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 160404	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 160408	0,2	7°	0.03-0.2	0.05-0.5	●
	2C-VCGW 160412	0,4	7°	0.03-0.2	0.05-0.5	●

Engineered for Excellence.

#EuroloyExcellence



Italy Office



Via Leonardo Da Vinci, 4 – 20054
Milano MI ITALIA



(+39) 0282398309



info@euroloy.com

Turkey Office



Üsküdar Cad. YEDPA No:1
Ataşehir -İstanbul -TÜRKİYE



(+90) 850 933 3408



euroloytr@euroloy.com